

KFD



KFD Sp. z o.o. – established 1996

ECO WOOD STOVES

STO 5260

cast iron stoves for continuous burning



KFD STO 5260

glass on front



KFD STO 5260 LR




glass on front, left and right sides






KFD STO 5260 4F




four sided version
(two doors and glasses on left and right sides)

Also available versions with glass on left side (L), glass on right side (R), glasses on both left and right sides (LR) and double-face version (2F).

	heating power range 3-15 kW
	efficiency 78%
	modern double combustion system

	heated surface 80-160 m ²
	heated capacity 75-380 m ³
	installation stand or legs

Optional equipment:

	automatic deflector (all models marked with "AD")
	direct air inlet
	version for low-energy and passive houses



KFD STO LUX 5260

glass on front



KFD STO LUX 5260 2F

double-face version
(two doors)

EN
13240



Also available versions with glass on left side (L), glass on right side (R), glasses on both left and right sides (LR) and four sided version (4F).

STOVES KFD STO 5260 – product characteristics and advantages



SOLID AND DURABILITY

Robust construction in cast iron of highest quality ensures safety and reliability for many years of non-stop burning.



EFFICIENCY AND ECOLOGY

Modern double combustion system ensures the maximum use of the energy generated during burning of the wood and protects the environment.



HIGHER HEATING EFFICIENCY

A wide deflector forces a longer circulation of combustion gas inside the hearth. Thanks to this, the efficiency is higher and combustion is more ecological.



SAFETY AND EXCELLENT FIRE VIEW

All glasses are made of transparent ceramic, with thermal resistance up to 800°C and thermal shocks. Thanks to combination of pyrolysis effect and proper air circulation the glass stays clear for longer.



HEATING OUTPUT CONTROL

Precise regulation of the air inlet, gives control over the combustion and heating output of the stove.



TIGHTNESS, AESTHETICS AND COMFORT

Door is blocked by a precise lock, which closes the door tightly. The products are equipped with a “cold handle” or a glove, which makes the operation comfortable and secure.




COMFORT OF USE

Stoves are equipped with ash pan for easy ash removal.



EASY MAINTENANCE

All parts can be dismantled from the inside of the hearth. In consequence it allows easy maintenance, with no need to dismantle the stove.

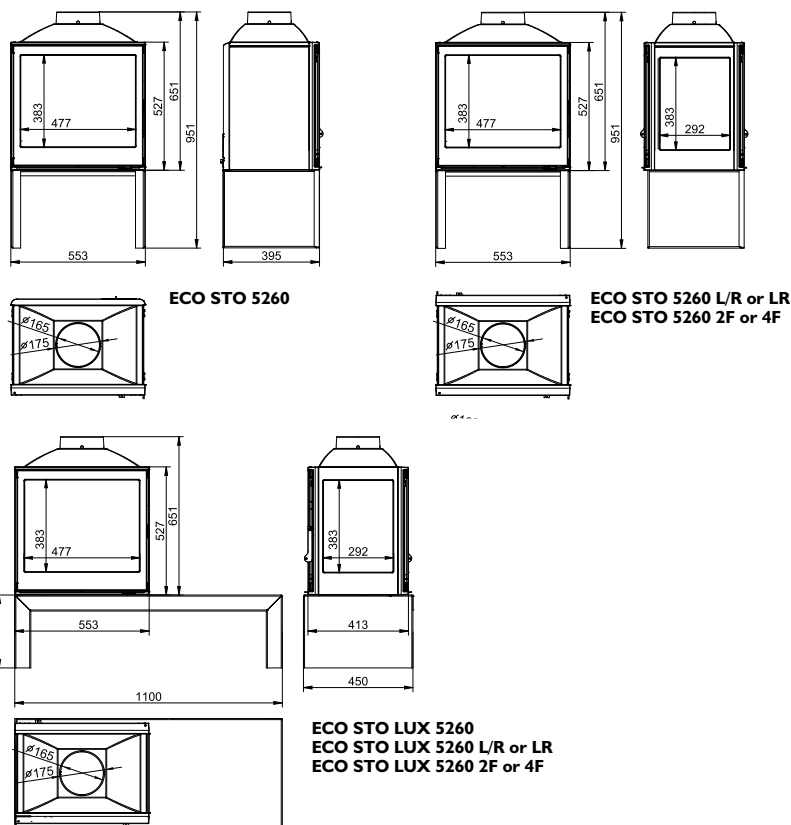

KFD STO 5260

technical data

rated power [kW]*	11
heating power range [kW]*	3-15
efficiency [%]*	78
CO emission at 13% O ₂ [%]*	0,09
heated surface [m ²]	80-160
heated capacity [m ³]	75-380
maximum log length [cm]	50
maximum load of wood [kg]	4
minimum effective chimney height [m]	4
minimum negative pressure in chimney duct [Pa]	12

dimensions and weight

total dimensions, height x width x depth [mm]	651 x 553 x 395
front dimensions, width x height [mm]	553 x 527
front glass dimensions, width x height [mm]	477 x 383
smoke outlet external diameter [mm]	175
smoke outlet internal diameter [mm]	165
air inlet diameter [mm]	120

*Parameters according to the EN 13240 norm

	STO 5260	STO 5260 L/R	STO 5260 LR	STO 5260 2F/4F
weight [kg]	117	112	102	102



KFD Sp. z o.o.
 ul. Olszankowa 51, PL 05-120 Legionowo, Poland
 e-mail export@kfd.eu, www.kfdesign.eu
 phone +48 507 005 711, fax +48 227 741 711



KFD SELLER **KFD**

KFD Sp. z o.o. reserves the right to introduce without notification any changes of technical parameters, equipment and specifications of offered devices. Information given in this promotional material are pictorial. This publication does not constitute an offer within the meaning of the Art. 66 of the Civil Code. Individual settlement of features, warranty conditions and product specification takes place within the sales contract and the warranty card. KFD Sp. z o.o. is not responsible for print errors. © Copyright KFD Sp. z o.o. 2016. All rights reserved. Leaflet printed in Poland. Ver. KFDECOSTO5260ENG23112016.