



FIREBOXES AND FIREBOX-INSERTS

SUPRA technology applied to your comfort

A veritable concentrate of SUPRA's know-how, the firebox is a decisive factor when choosing a fire. The fruit of advanced technologies, the SUPRA firebox offers a quality of combustion and performances of the highest order, whilst providing gentle, regular heating power.

It is also the no. 1 contributor to your energy savings.

From an aesthetic point of view, the firebox is the best setting a fire can have, and the different views of the fire offered by SUPRA's fireboxes allow it to express itself in a multitude of ways.

Choosing a SUPRA firebox means enjoying the benefits of a long tradition of fire-making, a field in which SUPRA has excelled for 135 years.



DIADEME

Advantages of SUPRA fireboxes and inserts



THE WARRANTY 5 YEARS

SUPRA fireboxes are guaranteed for 5 years for your safety and peace of mind. The cast iron grates, smoke baffles, electrical components, cast iron hearth plates and sides and firebrick linings are guaranteed for 1 year.

The warranty does not cover seals, decorative coatings, vitroceramic glass, and in the event of excessive draught, the hearth plates and cast iron sides.




10 HOURS CONTINUOUS BURNING

An appliance certified for continuous burning according to standard EN 13240 is capable of maintaining a bed of embers sufficient to restart a fire after 10 hours operation on low burning speed without being reloaded. This type of appliance spares you the chore of systematically relighting the fire (in the conditions of installation and use set out in the instructions booklet). SUPRA has also equipped its appliances with large ashpans accessible while the fire is in use for easier maintenance.

QUALITY COMBUSTION

SUPRA has developed a technology known as "hot combustion + 150°C". It is based on the principle of "concentrating the heat" in the firebox, thanks to the insulated smoke baffle. The temperature in the combustion chamber can thus be 150°C higher than with traditional combustion.

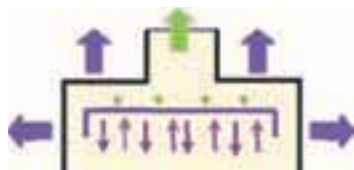

More heat is radiated through the window, which means the heat is released **faster and more effectively**.

- The combustion is complete, with clean smoke (low emissions), and the appliance is more efficient.
- Maintaining the firebox is **easier** too, as there is less ash. The bistro and smells, symptoms of "cold combustion" are absorbed.
- The glass stays **clean for longer**: this is the "pyrolysis" effect (self-cleaning of soot at 500°C on the inside of the glass), which comes into play on top of the "clean glass" system.




THE "CLEAN GLASS" SYSTEM

The "clean glass" system developed by SUPRA is based on the circulation of air along the vitroceramic window (resistant to 800°C).

The door frame channels air along the window which repels the smoke (optimum effectiveness at nominal burning speed).

The glass stays clean for longer.

This air also provides more oxygen for the flames and contributes to **clean combustion**.

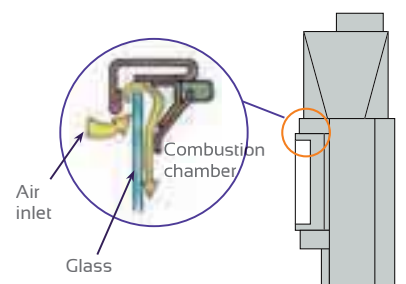

SMOKE BAFFLES

These are an essential part of the firebox: SUPRA uses stainless steel for its smoke baffles.



A refractory material, its mechanical strength is greater than that of the cast iron traditionally used.

The shape of the baffle and the reflective power of stainless steel help to concentrate the heat and maintain a high temperature in the firebox. Its effectiveness is further improved by the addition of vermiculite insulation on some models.

LIFT-UP DOORS

SUPRA has chosen to use a "synchronised double chain lifting" system for its fires with a lift-up door.



This ensures the movement of the door remains silent and smooth over time. The door's trajectory is designed to avoid any friction between the seals and the fixed frame. As it is raised, the door automatically moves away from the frame and comes back into contact with it in the top and bottom position to guarantee a tight seal.

THE TRIPLE ENVELOPE COMBUSTION CHAMBER (2+1)

This is the ideal solution to guarantee the lasting, performance and continued safety of the firebox. Consisting of an airtight double wall (steel + cast iron), it diffuses the heat more quickly. A third safety wall (included as standard or optional) made of reflective steel protects the firebox's environment against overheating.



CONNECTION OF THE COMBUSTION AIR




Depending on the insulation and equipment in the house, the combustion air must be taken from outside the room.

SUPRA has created the "IN'AIR" module (compatible with mechanical ventilation systems) to take air from outside the room.

It does not interfere with the operation of the fire, output is optimised and comfort is improved (no draughts).

SUPRA's recommendations for totally safe heating

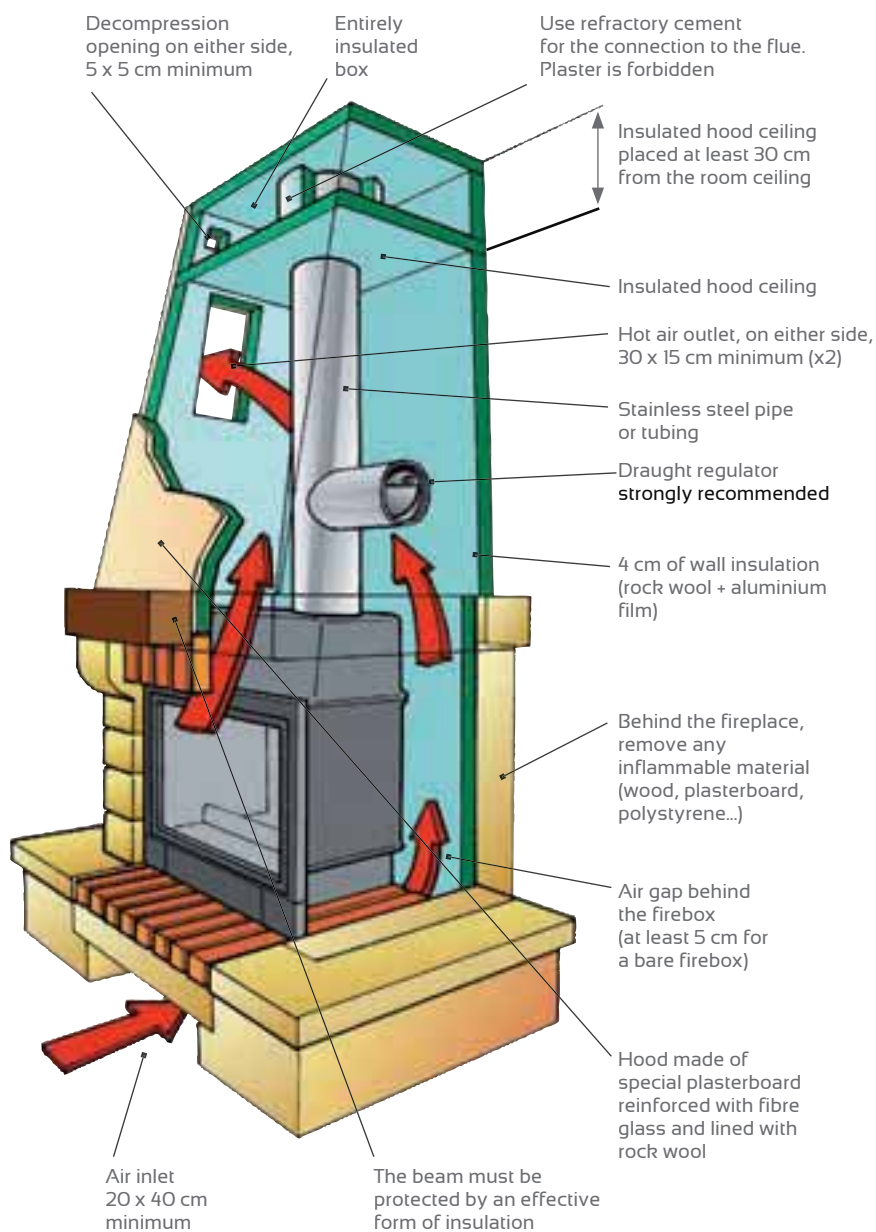


A2C2 WARM



AIR DISTRIBUTOR

Fireboxes and inserts are able to heat large spaces thanks to the A2C2 system ("Active Air Cheminée Concept") developed by SUPRA. Consisting of a turbine kit and a warm air distributor, this system allows you to diffuse heat to several other rooms for even greater comfort and further savings. It works on the principle of using the turbine to create overpressure in the air distributor envelope; the hot air is "pushed" around the firebox. This technology avoids the unpleasant emission of smoke into the warm air circuit. The A2C2 system meets the requirements of DTU 24-2 of December 2006 and is certified by Technical Evaluation Certificate 14/05-931-01.

Information given for guidance. Follow the installation instructions. Use a professional capable of assuming responsibility for the installation.

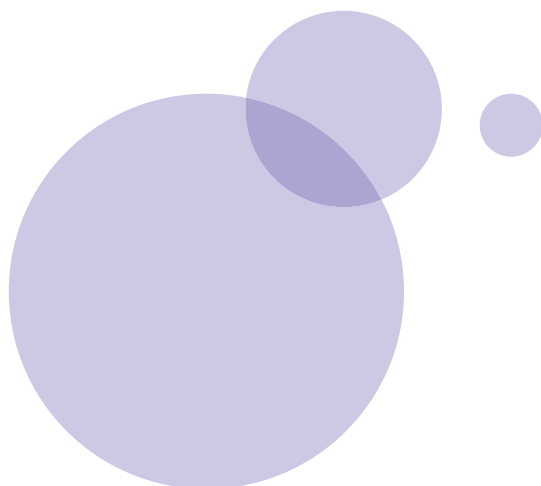

IMPORTANT

What you need to know



THE DRAUGHT: THE KEY TO SUCCESS!

The correct operation of your appliance depends on the quality of the draught in the chimney. Too much draught and the fire will flare up too strongly. The best solution to control your fire and optimise the combustion is to fit a draught regulator. This is fitted to the connection pipe in the room where the firebox or insert is located. SUPRA is the first manufacturer to have obtained for its regulator the French Technical Evaluation Certificate 14/04 - 922 - 01 issued by the CSTB (Building Industry Scientific and Technical Centre).

HEATING POWER

In accordance with standard EN 13229, SUPRA provides for its products the nominal output, officially defined and recognised.



This is the average output measured during a standardised test.

OUTPUT: THE REAL TEST OF EFFICIENCY

The output is the firebox's capacity to release into the home the heat initially contained in the wood. The higher the output, the lower the wood consumption.

If good quality dry wood is used (oak, hornbeam, beech...), SUPRA fireboxes can reduce wood consumption by 50% compared to an ordinary firebox.

N.B.: The best outputs are deliberately limited to 85%, as 15% of the heat must be reserved to maintain the draught indispensable to the correct operation of the appliance.

COMPLIANCE WITH STANDARDS

SUPRA fireboxes are designed, tested and manufactured in accordance with the specifications of European standards EN 13240 and EN 13229. They meet the requirements of the "Construction Products" directive (89/106/EEC directive).

PRODUCT CERTIFICATION



NF CERTIFICATION

The NF mark is a guarantee of the quality and safety of SUPRA appliances. It also guarantees the compliance of the product with all French standards. As they are controlled regularly, NF certified SUPRA products are your best guarantee of a CONSTANT level of quality. The products are subject to continuous quality control by an independent and impartial outside body: initial testing of the appliances, annual checking in the factory and periodic sampling.

Diadème, Cristal, Univers: exceptional fireboxes!

SUPRA has created the Diadème, Cristal and Univers ranges of fireboxes to enable you to enjoy the fire with a whole new dimension: a maximum amount of satisfaction, a minimum of constraints.




Hearth plate (exclusive design)

Because not everybody uses their heating appliance in the same way, SUPRA's ranges come in three levels of performance:


- "Premium": for use by those who want to enjoy the fire first and foremost.
- "Pack" and "Ventilated Pack": whilst still offering the same aesthetic advantages, these fireboxes are also technologically equipped to meet the added needs of efficiently heating a modern home.

And so that when you wish, you can also enjoy the direct contact with the fire offered by an open hearth, these exceptional fireboxes are also available with a lift-up door ...



SUPRA FIREBOXES HAVE EVERYTHING YOU COULD WISH FOR

- EXCEPTIONALLY LARGE WINDOWS
- BEAUTIFUL HEARTH PLATES
- PURE LINES
- ELEGANT DOORS



Univers



Cristal



Diadème

FUNCTIONALITIES

HIGHLY USER FRIENDLY

- A more comfortable, quieter door mechanism.
The door lifting system is based on the "synchronised double chain lifting" technology.
The door fits perfectly tight thanks to the new, exclusive "double-point" side locking system.
- Ergonomic controls allow the fire to be controlled by progressive movements, thanks to a "rod-type actuator".

INNOVATIVE FEATURES

- "2+1" triple envelope airtight combustion chamber for optimum reliability.
- Anti-smoke compartment: comes as standard on all fireboxes with lift-up doors.
- New connection nozzle with collector: any condensate is burned inside the firebox, thus eliminating unpleasant odours.
- Heat exchanger with bypass valve: exclusive to SUPRA, it increases the firebox's output (Pack models).
- All fireboxes are supplied with height-adjustable support feet and heat protection casing.
- "Clean glass" system

3 LEVELS OF PERFORMANCE

- "Premium": when what counts is the pleasure of a real fire and easy control.
 - Two controls discreetly integrated in the front: one for the primary air, the other for the draught damper (flue valve control)
 - Stainless steel flue valve with progressive adjustment of the open position
 - "INOXIS HR" (High Radiation) smoke baffle, which directs the smoke perfectly and concentrates the heat in the combustion chamber to obtain an even cleaner glass surface
 - Nominal output of 11 kW

- "Pack": when what counts is the pleasure of a real fire and high performance.

The "Pack" models have the following extra features:

- Warm air distributor cover
- Post-combustion ramp with pre-heated tertiary air
- "INOXIS THR" (Very High Radiation) heat exchanger unit with high performance composite baffle (stainless steel and vermiculite) and bypass valve
- "IN'AIR" connection module for the combustion air circuit air supply (possible connection to an external air intake)


- "Ventilated Pack": for better distribution of the heat.

- Fireboxes equipped as standard with the KT 1455 turbine.

ADVANTAGES OF THE "PACK" MODELS:




- More heating power: 13 kW (nominal)
- Higher output (up to 75%)
- Lower wood consumption
- Longer lasting fire (will last the night)
- Optimum combustion quality
- Connection of the combustion air: operation of the appliance unaffected by the negative pressure created by mechanical ventilation systems and cooker hoods
- Eliminates draughts



Double-point door locking



Post-combustion ramp



"IN'AIR" module



"INOXIS THR" heat exchanger unit:

Cristal

[NEW]










Strong points






- The beauty of the fire, all in angles
- Output: 70% (Premium), 73% (Pack)
- Nominal output 11 kW (Premium) or 13 kW (Pack)
- Cast iron (401) or brick (431) lining
- Lift-up door
- Safety locking
- Side opening to facilitate cleaning of the glass
- "Clean glass" system
- Combustion air and valve control levers
- Options :
 - KTE 152 bi-turbo kit
 - Turbine kit KT 1455
 - KRT 260 A adapter (only with KT 1455)
 - Warm air nozzles \varnothing 150 mm
 - Warm air distributor cover CDA 450 A (on Premium)










CRISTAL 2-401 B-B

PREMIUM

-  "Flamme Verte" quality charter
-  Clean glass system
-  For 50 cm logs*
-  Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety
-  Brick interior
-  Heating body with cast iron lining
-  Optional air distributor
-  Flue valve: reduces wood consumption
-  Lift-up door

-  Support foot included
-  Automatic locking glass door
-  Smoke collector with Inoxis HR smoke baffle: helps concentrate the heat and amplifies the clean glass system
-  Smoke flue with collector: allows any condensate to be burned completely
-  2-point side door locking: gives a better seal
-  Levelling screws, for secure, stable installation
-  Anti-smoke compartment: recovers the smoke that billows out when the door is opened too quickly
-  Optional turbines
-  Surface heated (table p. 113)

PACK VERSION ADVANTAGES

-  Air distributor included
-  Bypass valve: new generation valve for better output
-  Post-combustion: the smoke is burnt a second time for better output
-  Pre-heating of the secondary air in a special heat exchanger
-  Inoxis THR heat exchanger unit: helps concentrate the heat and amplifies the clean glass system
-  IN'AIR connection module, for operation independently of the mechanical ventilation system
-  Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

Cristal

[NEW]



CRISTAL 2-431 B-N

■ Premium version

- Nominal output: 11 kW
- "Triple envelope" airtight combustion chamber
- INOXIS HR smoke baffle

■ Pack version


- Nominal output: 13 kW
- IN'AIR module
- INOXIS THR heat exchanger with post-combustion
- Long-lasting fire
- Adjustable glass air
- Warm air distributor cover



"Push-Pull" levers

■ Ventilated Pack version

- Pack
- Warm air distribution with ventilation turbine

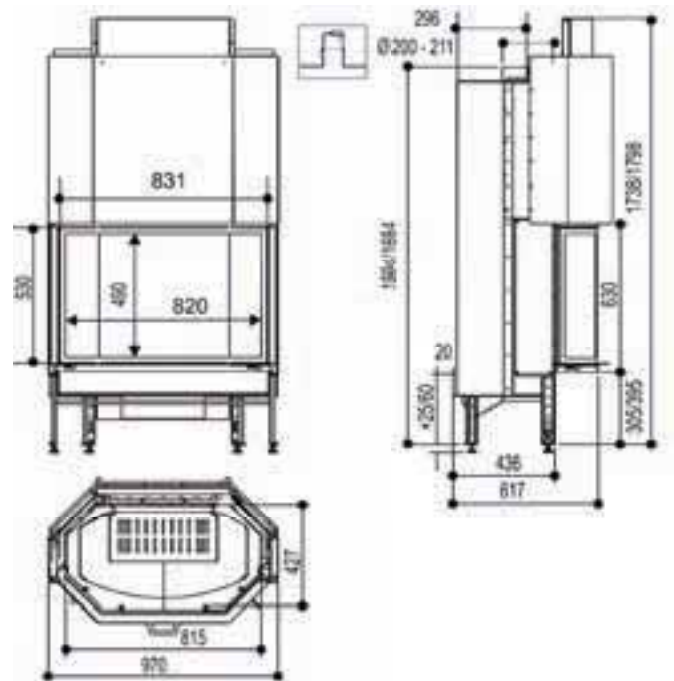

MODEL		CRISTAL 2-401				CRISTAL 2-431			
VIEW		PRISMATIC				PRISMATIC			
DOOR OPENING		LIFT-UP*				LIFT-UP*			
DOOR DESIGN		BLACK	REF.	BRASS	REF.	BLACK	REF.	BRASS	REF.
VERSIONS	PREMIUM	401 B - N	111280	401 B - B	111281	431 B - N	111283	431 B - B	111282
	PACK	401 B - PACK N 401 B - PACK VN	111290 111294	401 B - PACK B	111292	431 B - PACK N 431 B - PACK VN	111291 111295	431 B - PACK B	111293

(*) Side opening for easy cleaning of the glass.

Diadème

[NEW]










Strong points










- The beauty of the fire, all in curves
- Output: 70% (Premium), 73% (Pack)
- Nominal output 11 kW (Premium) or 13 kW (Pack)
- Cast iron (501) or brick (531) lining
- Lift-up door
- Safety locking
- Side opening to facilitate cleaning of the glass
- "Clean glass" system
- Combustion air and valve control levers
- Options :
 - KTE 152 biturbo kit
 - KT 1455 turbine kit
 - KRT 260 A adapter (only with KT 1455)
 - Warm air nozzles ø 150 mm
 - Warm air distributor cover CDA 450 A (on Premium)










Diadème 501 B-N

PREMIUM

-  "Flamme Verte" quality charter
-  Clean glass system
-  For 50 cm logs*
-  Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety
-  Brick interior
-  Heating body with cast iron lining
-  Optional air distributor
-  Flue valve: reduces wood consumption
-  Lift-up door

-  Support foot included
-  Automatic locking glass door
-  Smoke collector with Innox HR smoke baffle: helps concentrate the heat and amplifies the clean glass system
-  Smoke flue with collector: allows any condensate to be burned completely
-  2-point side door locking: gives a better seal
-  Levelling screws, for secure, stable installation
-  Anti-smoke compartment: recovers the smoke that billows out when the door is opened too quickly
-  Optional turbines
-  Surface heated (table p. 113)

PACK VERSION ADVANTAGES

-  Air distributor included
-  Bypass valve: new generation valve for better output
-  Post-combustion: the smoke is burnt a second time for better output
-  Pre-heating of the secondary air in a special heat exchanger
-  Innox THR heat exchanger unit: helps concentrate the heat and amplifies the clean glass system
-  IN'AIR connection module, for operation independently of the mechanical ventilation system
-  Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

Diadème

[NEW]




■ Premium version

- Nominal output: 11 kW
- "Triple envelope" airtight combustion chamber
- INOXIS HR smoke baffle

■ Pack version

- Nominal output: 13 kW
- IN'AIR module
- INOXIS THR heat exchanger with post-combustion
- Long-lasting fire
- Adjustable glass air
- Warm air distributor cover

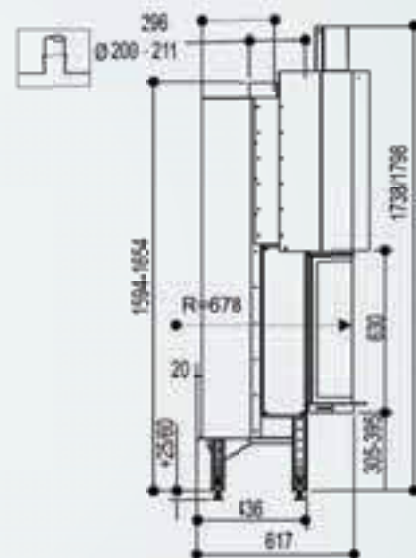

1,75 m



MODEL	DIADÈME 501		DIADÈME 531		
VIEW	CURVED		CURVED		
DOOR OPENING	LIFT-UP*		LIFT-UP*		
DOOR DESIGN	BLACK	REF.	BLACK	REF.	
VERSIONS	PREMIUM	501 B - N	111302	531 B - N	111303
	PACK	501 B - PACK N 501 B - PACK VN	111310 111312	531 B - PACK N 531 B - PACK VN	111311 111313



"Push-Pull" levers

(*) Side opening for easy cleaning of the glass.

Univers

Strong points

- Fully enjoy the sight of the fire
- Output: 71% (Premium), 72% (Pack)
- Nominal output 11 kW (Premium) or 13 kW (Pack)
- Highly user friendly
- Optimised glass surface 71 x 51 cm
- Lift-up door for Univers 201-231 and side opening for easy to facilitate cleaning of glass
- Side opening for Univers 200-230
- Large ashpan 4.8 l.
- "Clean glass" system
- Options (all models except ventilated Pack):
 - KTE 152 biturbo kit
 - KT 1455 turbine
 - KRT 260 A adapter (only with KT 1455)
- Options (all models):
 - Warm air nozzles \varnothing 150 mm
 - ORFEO decorative front
 - Warm air distributor cover CDA 200 A (on Premium)












 UNIVERS 2-200 AD-PN










 UNIVERS 2-201 A-PACK PN

PREMIUM

-  "Flamme Verte" quality charter
-  French standard
-  Clean glass system
-  For 50 cm logs*
-  Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety
-  Brick interior
-  Heating body with cast iron lining
-  Optional air distributor
-  Flue valve: reduces wood consumption

-  Lift-up door
-  Support foot included
-  Smoke collector with Inoxis HR smoke baffle: helps concentrate the heat and improves the performance clean glass system
-  Smoke flue with collector: allows any condensate to be burned completely
-  2-point side door locking: gives a better seal
-  Levelling screws, for secure, stable installation
-  Anti-smoke compartment: recovers the smoke that billows out when the door is opened too quickly
-  Optional turbines
-  Surface heated (table p. 113)

PACK VERSION ADVANTAGES

-  Air distributor included
-  Bypass valve: new generation valve for better output
-  Post-combustion: the smoke is burnt a second time for better output
-  Pre-heating of the secondary air in a special heat exchanger
-  Inoxis THR heat exchanger unit: helps concentrate the heat and amplifies the clean glass system
-  IN'AIR connection module, for operation independently of the mechanical ventilation system
-  Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

Univers



Adaptable to the ORFEO range of decorative fronts

See page 10





UNIVERS 2-230 AD-PN



UNIVERS 2-231 A-PN

- Premium version
 - Nominal output: 11 kW
 - "Triple envelope" airtight combustion chamber
 - INOXIS HR smoke baffle
- Pack version
 - Nominal output: 13 kW
 - IN'AIR module
 - INOXIS THR heat exchanger with post-combustion
 - Long-lasting fire
 - Warm air distributor cover included

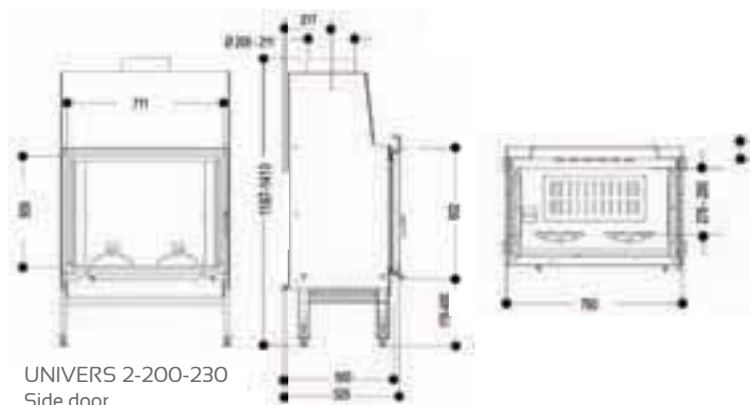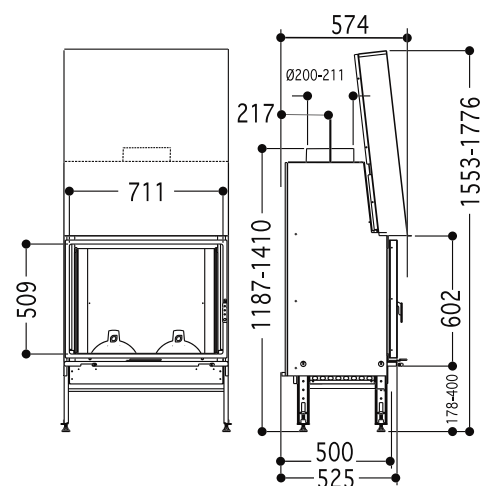

UNIVERS 2-200-230
Side door

UNIVERS 2-201-231
Lift-up door

MODEL		UNIVERS 2-200 / 201				UNIVERS 2-230 / 231			
DOOR OPENING		SIDE	REF.	LIFT-UP*	REF.	SIDE	REF.	LIFT-UP*	REF.
VERSIONS	PREMIUM	200 AD - PN	111535	201 A - PN	111502	230 AD - PN	111536	231 A - PN	111543
	PACK	200 AD - PACK PN 200 AD - PACK VPN	111537 111625	201 A - PACK PN 201 A - PACK VPN	111507 111627	230 AD - PACK PN	111538	231 A - PACK PN 231 A - PACK VPN	111544 111628

(*) Side opening for easy cleaning of the glass.

Cosmos / Diamant



 COSMOS 1520 ADN

COSMOS 1520 ADN

- Curved front
- Output 71 %
- Nominal output 8 kW
- "Triple envelope" heating body
- IN'AIR combustion module

- Cast iron door and inside; side opening
- Flue valve
- Large ashpan 3,9 l.
- Warm air distributor included
- "Clean glass" system
- INOXIS HR smoke baffle
- Optional:
 - KTE 152 biturbo kit





 DIAMANT 1421 AN



DIAMANT 1421 AN

- Prismatic view of the fire
- Output 71 %
- Nominal output 9 kW
- "Triple envelope" heating body
- IN'AIR combustion module
- Cast iron interior

- Lift-up and side opening to facilitate cleaning of the glass
- Flue valve
- Large ashpan 3,9 l.
- "Clean glass" system
- Warm air distributor included
- Optional:
 - KTE 152 biturbo kit

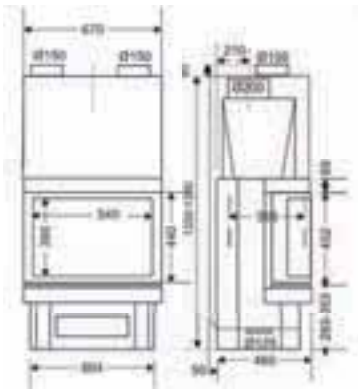

COSMOS 1520 ADN

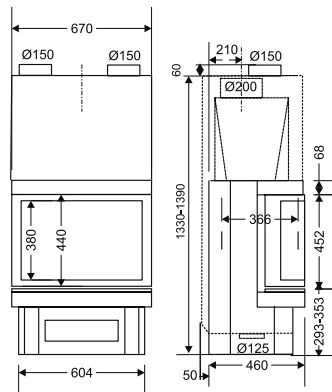

DIAMANT 1421 AN



1,75 m

Cosmos

Diamant

MODEL	COSMOS 1520 ADN		DIAMANT 1421 AN	
VIEW	CURVED		PRISMATIC	
DOOR OPENING	SIDE	REF. 111828	LIFT-UP	REF. 111826

(*) Side opening for easy cleaning of the glass.



"Flamme Verte" quality charter



Clean glass system



For 50 cm logs*



Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety



Heating body with cast iron lining



Air distributor included



Flue valve: reduces wood consumption



Lift-up door



Support foot included



IN'AIR connection module, for operation independently of the mechanical ventilation system



Levelling screws, for secure, stable installation



Optional turbines



Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

FV 40 D / FV 51




FV 40 D


FV 40 D

- Vertical view of the fire
- Output 75 %
- Nominal output 8 kW
- "Triple envelope" combustion chamber
- INOXIS THR smoke baffle

- Side opening
- Large easily removable ashpan
- Logs 40 cm (horizontally) or 50 cm max. (vertically)
- Optional warm air distributor

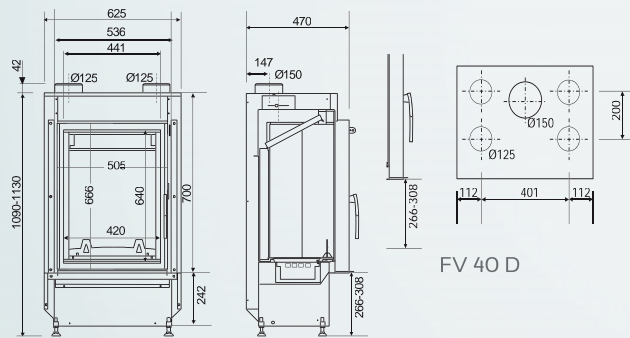

FV 40 D

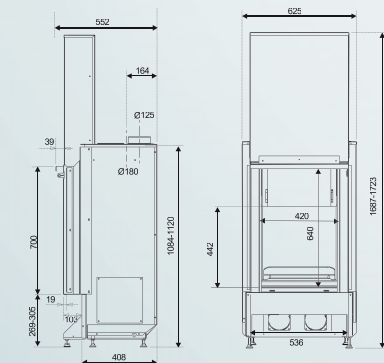

FV 51



FV 51

FV 51

- Vertical view of the fire
- Output 71 %
- Nominal output 9 kW
- "Triple envelope" combustion chamber
- IN'AIR combustion module
- INOXIS HR smoke baffle

- Glass door lifts up and tilts for cleaning
- Large easily removable ashpan
- Logs 40 cm (horizontally) or 50 cm max. (vertically)
- Warm air distributor included



"Flamme Verte" quality charter



Clean glass system



For 33 cm logs*



Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety



Brick interior



Air distributor included (optional on the FV 40)



Flue valve: reduces wood consumption



Lift-up door



Support foot included



Pre-heating of the secondary air in a special heat exchanger



Smoke collector with Innox HR smoke baffle: helps concentrate the heat and amplifies the clean glass system



Innox THR heat exchanger unit: amplifies the concentration of the heat and allows double combustion



IN'AIR connection module, for operation independently of the mechanical ventilation system



Levelling screws, for secure, stable installation



Optional turbines



Surface heated (table p. 113)

MODEL	FV 40 D		FV 51	
DOOR OPENING	SIDE	REF. 111475	LIFT-UP*	REF. 111871
DIMENSIONS W x H x D	62 x 109 to 113 x 47		62 x 169 to 172 x 55	

(*) Side opening for easy cleaning of the glass.

* Indication of the standard size of logs on general sale.


Émeraude

Strong points

- Panoramic view of the fire
- Output 74 %
- Nominal output 11 kW / 10 kW (1800 D)
- Cast iron or brick interior
- Cast iron plates removable from the inside of the firebox
- Double-sided heating body (resists thermal shocks and provides total airtightness)
- Double safety locking
- Side opening (1800, 1800 D) or lift-up opening (1801, 1821, 1831)
- Flue valve
- Curved glass door
- "Clean glass" system
- Options :
 - KTE 152 biturbo kit
 - DA 1800
 - 2 extra hot air nozzles \varnothing 150 mm



ÉMERAUDE 1801

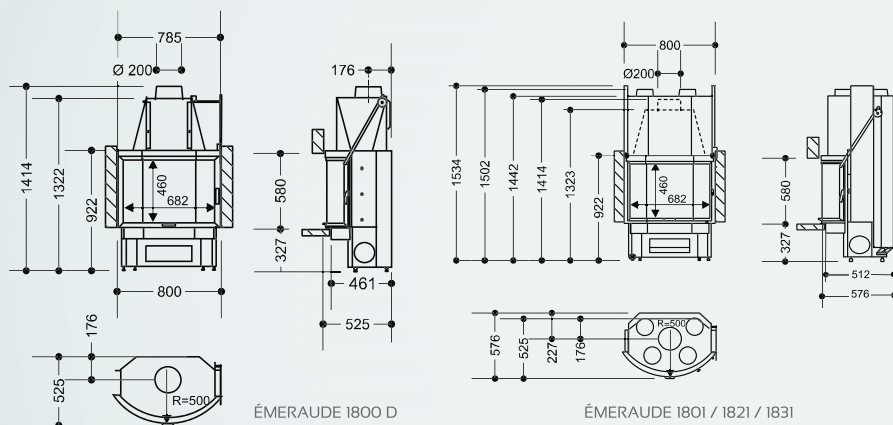

ÉMERAUDE 1800 D

ÉMERAUDE 1801 / 1821 / 1831



Brick interior



Heating body with cast iron lining



Optional air distributor



Flue valve:
reduces wood consumption



Lift-up door

Except 1800



Support foot included



Automatic locking glass door

Except 1800



Smoke collector with Inox HR smoke baffle: helps concentrate the heat and amplifies the clean glass system



"Flamme Verte" quality charter



Clean glass system



For 50 cm logs*



Levelling screws, for secure, stable installation



Optional turbines



Surface heated (table p. 113)

MODEL	ÉMERAUDE 1800		ÉMERAUDE 1801 / 1821 / 1831	
VIEW	CURVED		CURVED	
DOOR OPENING	SIDE	REF.	LIFT-UP*	REF.
	1800 / 1800 D	111357	1801	111358
			1821	111370
			1831	111372

(*) Side opening for easy cleaning of the glass.

* Indication of the standard size of logs on general sale.


Saphir

Strong points


- Fully enjoy the sight of the fire
- Output 74 %
- Nominal output 11 kW / 10 kW (1700 D)
- Cast iron or brick interior
- Cast iron plates removable from the inside of the firebox
- Double-sided heating body (resists thermal shocks and provides total airtightness)
- Double safety locking
- Side opening (1700, 1700 D) or lift-up opening (1701, 1721, 1731)
- Flue valve
- Prismatic glass pane
- "Clean glass" system
- Options :
 - KTE 152 biturbo kit
 - DA 1700
 - 2 extra hot air nozzles \varnothing 150 mm






 SAPHIR 1701

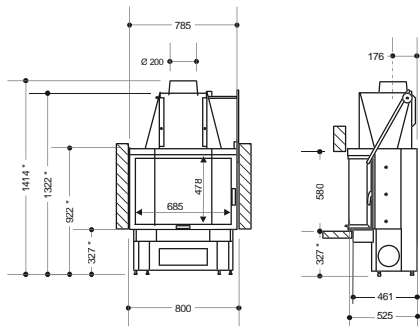

SAPHIR 1700 D

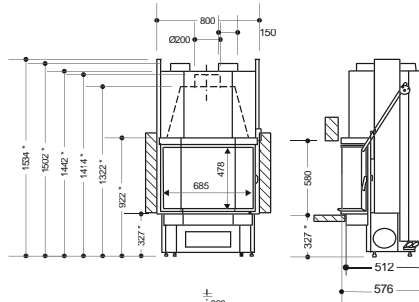



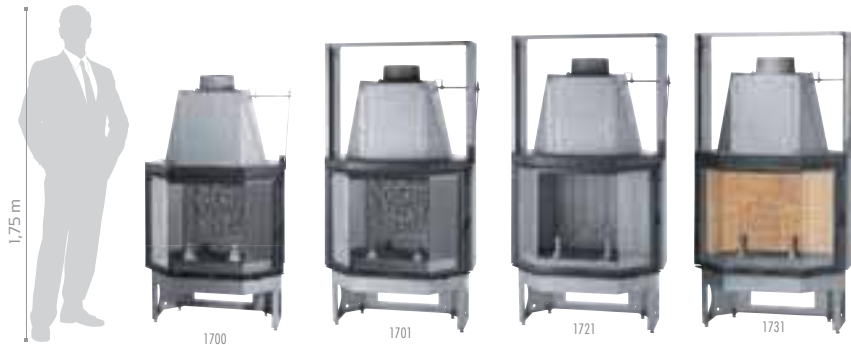







SAPHIR 1701 / 1721 / 1731



MODEL	1700		1701 / 1721 / 1731	
VIEW	PRISMATIC		PRISMATIC	
	SIDE	REF.	LIFT-UP*	REF.
DOOR OPENING	1700 / 1700 D	111351	1701	111352
			1721	111368
			1731	111355

(*) Side opening for easy cleaning of the glass.

-  INTERIEUR
BRIQUE
SAPHIR 1731
-  Heating body with cast iron lining
SAPHIR 1701 - 1721
-  Optional air distributor
-  Flue valve:
reduces wood consumption
-  Lift-up door
Except 1700
-  Support foot included
-  Automatic locking glass door
Except 1700
-  Smoke collector with Inox HR smoke baffle: helps concentrate the heat and amplifies the clean glass system
-  Levelling screws, for secure, stable installation
-  Optional turbines
-  Surface heated (table p. 113)


-  "Flamme Verte" quality charter
-  Clean glass system
-  For 50 cm logs*

* Indication of the standard size of logs on general sale.

CARAT 58

Strong points

- Square view of the fire
- Output 78 %
- Nominal output 9 kW
- "Triple envelope" combustion chamber
- Cast iron interior
- IN'AIR combustion module
- Lift-up opening
- Hot air distribution system included
- Flue valve
- Glass door tilts for cleaning
- Large easily removable ashpan
- "Clean glass" system

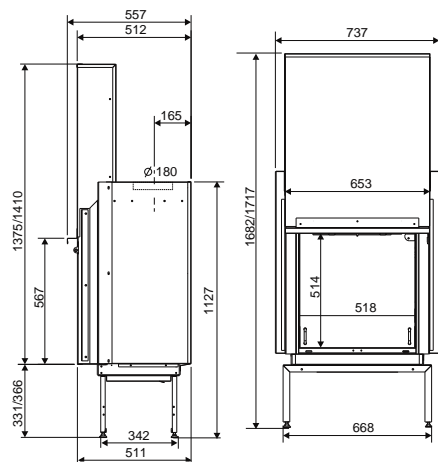

MODEL	CARAT 58		CARAT 58 R
DOOR OPENING	LIFT-UP*	REF. 111931	REF. 111932
DIMENSIONS W x H x D	74 x 168 to 172 x 56		

(*) Side opening for easy cleaning of the glass.



 CARAT 58

CARAT 58 is also available in a connectable version CARAT 58 R.



"Flamme Verte" quality charter



Clean glass system



For 50 cm logs*



Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety



Cast iron interior



Air distributor included



Flue valve: reduces wood consumption



Lift-up door



Support foot included



Pre-heating of the secondary air in a special heat exchanger



Smoke collector with Inox HR smoke baffle: helps concentrate the heat and amplifies the clean glass system



IN'AIR connection module, for operation independently of the mechanical ventilation system



Levelling screws, for secure, stable installation



Optional turbines



Surface heated (table p. 113)


* Indication of the standard size of logs on general sale.

Eclipse / Eclipse DF

Strong points

- Panoramic view of the fire (width of window 95 cm)
- Double panoramic view of the fire: 2 lift-up sides* (Eclipse DF)
- Output 70 % (Eclipse), 55 % (Eclipse DF)
- Nominal output 11 kW (Eclipse), 10 kW (Eclipse DF)
- Screen-printed finish
- Lift-up door with double-point side locking
- Rotary combustion control
- Large ashpan
- Flue valve
- "Clean glass" system
- Support foot adjustable up to 50 cm
- Optional:
 - DA 1000 (except Eclipse DF)

* The two sides must not be raised at the same time

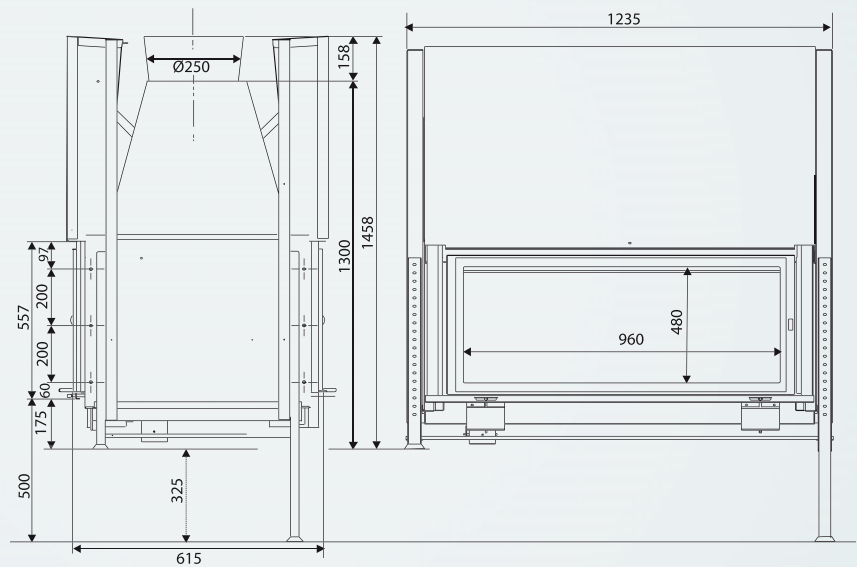









ECLIPSE DF



MODEL	ECLIPSE		ECLIPSE DF	
DOOR OPENING	LIFT-UP*	REF. 111850	LIFT-UP*	REF. 111873

(*) Side opening for easy cleaning of the glass.


-  "Flamme Verte" quality charter
-  Clean glass system
-  Brick interior
-  Flue valve: reduces wood consumption

-  Lift-up door
-  Support foot included
-  Levelling screws, for secure, stable installation
-  Surface heated (table p. 113)

DF 583 N

Strong points

- Double-sided view of the fire for installation in the centre of a room
- Output 71 %
- Nominal output 10 kW
- Two glass sides
- Cast iron lining
- Side opening on both sides
- Lift-up door on one side
- Large ashpan 4,8 l.
- Warm air distributor fitted as standard (natural convection only)
- "Clean glass" system
- 2 warm air nozzles \varnothing 150 mm included
- Optional:
 - ORFEO decorative front

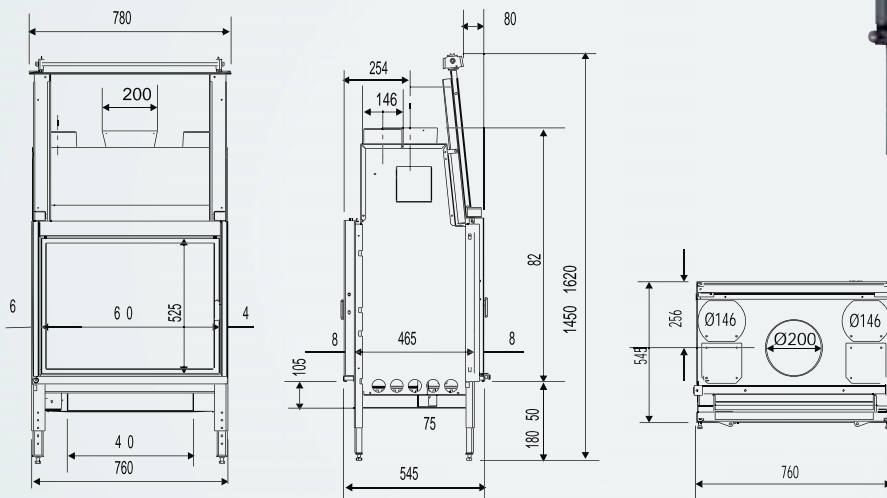

DF 583 N
 1 Lift-up door
 1 side-opening door



MODEL	DF 583 N	
DOOR OPENING	LIFT-UP*	REF. III868

(*) Side opening for easy cleaning of the glass.


- "Flamme Verte" quality charter
- Clean glass system
- For 50 cm logs*
- Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety
- Heating body with cast iron lining
- Air distributor included
- Flue valve: reduces wood consumption
- Lift-up door
- Support foot included
- Smoke flue with collector: allows any condensate to be burned completely
- Levelling screws, for secure, stable installation
- Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

Supravisión

Strong points

- The beauty of the fire, all in angles
- Output 71 %
- Nominal output 11 kW
- Cast iron interior
- Possible diffusion of heat to other rooms
- Glass front + side(s)
- Chain-operated lift-up door; safe and robust
- Guided by ball bearings
- Very large capacity ashpan 7.4 l.
- "Clean glass" system
- Options :
 - Warm air nozzles \varnothing 150 mm
 - KT 1455 + KRT 255 turbine
 - Warm air distributor cover CDA 255

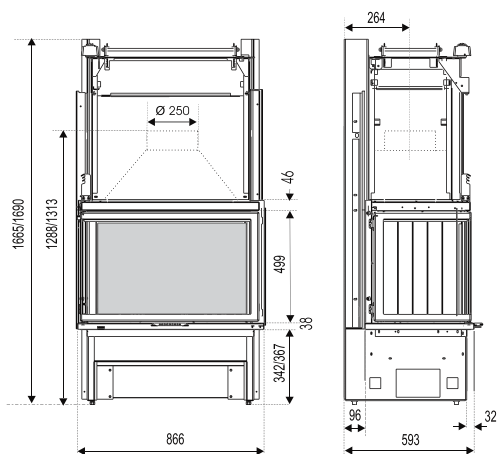




SUPRAVISION 267



SUPRAVISION 255 A















SUPRAVISION 267

-  SUPRAVISION 269
Glass front + right side
-  SUPRAVISION 267
Glass front + left side
-  SUPRAVISION 255 A
Glass front + 2 sides



MODEL	SUPRAVISION	
	DOOR OPENING	REF.
VERSIONS	LIFT-UP*	
	255 A	111255
	267	111720
	269	111721

(*) Side opening for easy cleaning of the glass.

-  "Flamme Verte" quality charter
-  Clean glass system
-  BOCHES STANDARD 50 cm For 50 cm logs*
-  Heating body with cast iron lining
-  Optional air distributor
-  Flue valve: reduces wood consumption
-  Lift-up door
-  Support foot included
-  Automatic locking glass door
-  Levelling screws, for secure, stable installation
-  Optional turbines
-  Surface heated (table p. 113)


* Indication of the standard size of logs on general sale.

Strong points

- Economical and efficient
- Output 78 %
- Nominal output 10 kW (Astra 2)
- Cast iron interior; wave hearth plate
- Cast iron plates removable from the inside if replacement needed: no need to dismantle the fireplace
- Cast iron door; side opening
- Stainless steel smoke baffle
- Flue valve
- Ashpan accessible during operation 5.2 l.
- "Clean glass" system
- Options :
 - Warm air distributor DA101
 - CPI01 casing
 - Extra warm air nozzles (if DA101) \varnothing 125 mm
 - PS67 support foot



 ASTRA 2

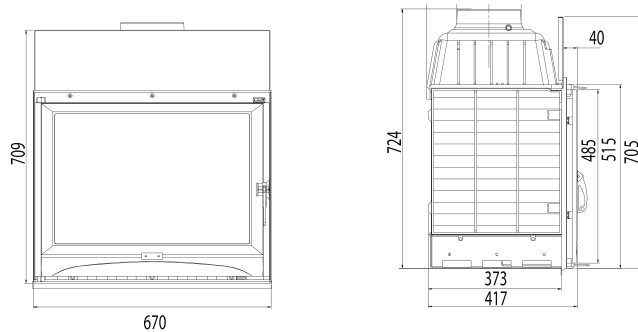

670

709

724

40

485

515

705

373

417

417

445


Astra 2 is also available in:
ASTRA 2 D
version with automatic door spring.



1,75 m



MODEL	ASTRA 2 / 2 D	
DOOR OPENING	SIDE	REF. 111893 / 111894



"Flamme Verte" quality charter



French standard



Clean glass system



For 50 cm logs*



Entirely cast iron heating body



Optional air distributor



Flue valve:
reduces wood consumption



Continuous fire,
the embers last over 10 hours



Ashpan accessible
while the fire is in use



Optional support foot available



Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

Strong points

- Exceptional output, compact model
- Output 75 %
- Nominal output 9 kW (Altima 106), 11 kW (Altima 105)
- Continuous fire, 10 hours (Altima 105)
- Cast iron firebox
- Stainless steel flue valve
- Ashpan accessible while the fire is in 5.2 l
- Cast iron door
- Independent ashpan door to remove the ash while the fire is in use
- "Clean glass" system
- Options :
 - KTE 152 biturbo kit
 - Support foot and warm air distributor: DA105


Altima 105 is also available in:
ALTIMA 105 D
version with automatic door spring.




ALTIMA 105




ALTIMA 106

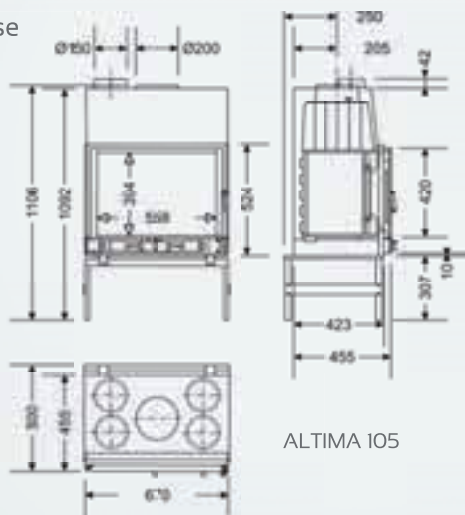

ALTIMA 105

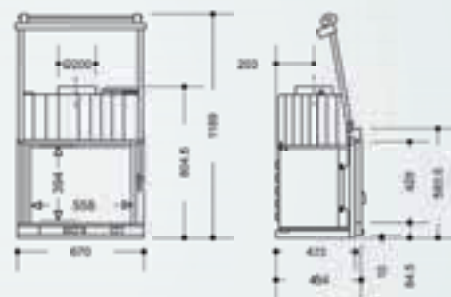

ALTIMA 106



1,75 m

MODEL	ALTIMA			
	DOOR OPENING	SIDE	REF.	LIFT-UP* REF.
VERSIONS	105	111126	106	111127
	105 D	111128		

(*) Side opening for easy cleaning of the glass.



"Flamme Verte" quality charter



Clean glass system



For 50 cm logs*



Entirely cast iron heating body



Optional air distributor



Flue valve: reduces wood consumption



10H PEL CONTI

Altima 105

Continuous fire, the embers last over 10 hours



Ashpan accessible while the fire is in use



Lift-up door



Optional support foot available



Optional turbines



Surface heated (table p. 113)



Surface heated (table p. 113)

Altima 105

* Indication of the standard size of logs on general sale.

Classiques

Strong points

- Outstanding performance
- Continuous fire, 10 hours (except 162C-168C)
- Cast iron firebox
- Cast iron plates removable from the inside of the firebox: if replacement is needed, no need to dismantle the fireplace!
- Automatic flue valve
- Large ashpan : 7 l.
- Independent ashpan door to remove the ash while the fire is in use
- "Clean glass" system



148 C
Output 73 %
Nominal output 13 kW
Side-opening door
Optional:
• Grill kit




150 C
Output 73 %
Nominal output 13 kW, 9 kW (150 CD)
Side-opening door
Support foot and casing included
Options :
• CDA 150 C cover
• KTE 152 biturbo kit
• 2 extra hot air nozzles (if CDA 150 C) ø 150 mm
• Grill kit






AUTOMATIC OPENING FLUE VALVE




When the door is opened, the flue valve opens automatically. This prevents a maximum of smoke billowing out into the room.



150 C / 150 CD



148 C



150 C / 150 CD

MODEL	CLASSIQUES			
DOOR OPENING	SIDE	REF.	LIFT-UP*	REF.
VERSIONS	148 C	111401	162 C	111412
	150 C	111400		
	152 C	111410	168 C	111411
	150 CD	111408		
	152 CD	111409		

(*) Side opening for easy cleaning of the glass.

Classiques






- 152 C
Output 73 %
Nominal output 13 kW, 9 kW (152 CD)
Side-opening door
Support foot and air distributor included
Options :
• KTE 152 biturbo kit
• 2 extra hot air nozzles
ø 150 mm
• Grill kit






- 162 C
Output 70 %
Nominal output 11 kW
Lift-up and side opening door
Support foot and air distributor included
Options :
• KTE 152 biturbo kit
• 2 extra hot air nozzles
ø 150 mm
• Grill kit



- 168 C
Output 70 %
Nominal output 11 kW
Lift-up and side opening door
Options :
• CDA 168 C (if DA 168 C) cover
• DA 168 C with support foot included
• 2 extra hot air nozzles
ø 150 mm (if DA 168 C)
• Grill kit
• KTE 152 (if DA 168 C)



152 C / 152 CD

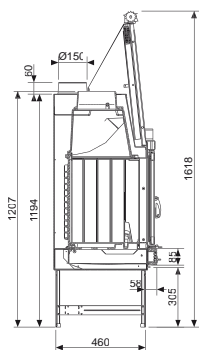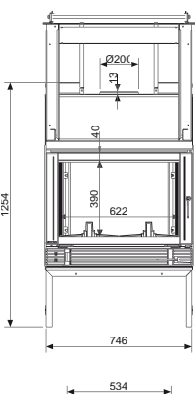

162 C / 168 C

The "Classiques" fireboxes 150 C and 152 C are also available in:
150 CD AND 152 CD
versions with automatic door spring.



Continuous fire, the embers last over 10 hours

148 - 150 - 152



"Flamme Verte" quality charter



French standard



Clean glass system



For 50 cm logs*



Entirely cast iron heating body



Air distributor included



Flue valve: reduces wood consumption



Ashpan accessible while the fire is in use



Lift-up door



Support foot included



Optional turbines



Optional grill



Surface heated (table p. 113)



Surface heated (table p. 113)

148 - 150 - 152

* Indication of the standard size of logs on general sale.

Temporis

Strong points


- 100% airtight firebox
- Output 81 %
- Nominal output 10 kW
- 10 hours continuous burning
- All glass front (Temporis 3D)
- Cast iron interior
- IN'AIR module with external air inlet
- Adjustable double combustion air circuit with pre-heated secondary air
- "Triple envelope" combustion chamber
- Double-envelope INOXIS HR smoke baffle
- Large ashpan
- Support foot
- Warm air distributor
- Options :
 - KTE 152 biturbo kit
 - 2 extra warm air nozzles
ø 150 mm or 4 nozzles ø 125 mm



Temporis 2 D



Temporis 3 D

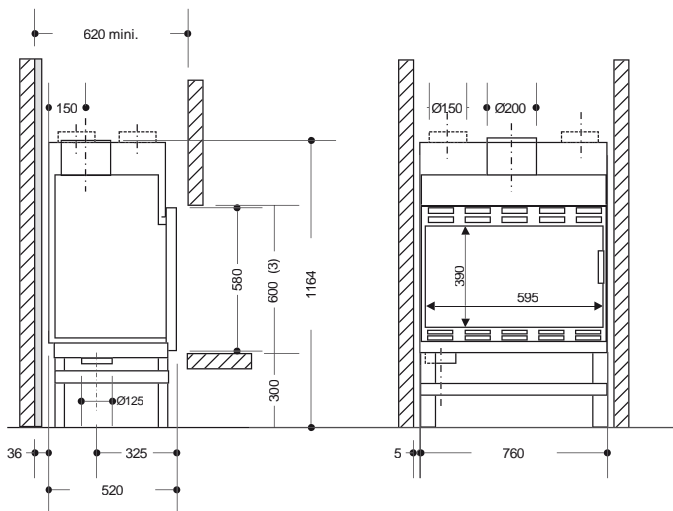

MODEL	TEMPORIS	
DOOR OPENING	SIDE	REF.
VERSIONS	2 D	111863
	3 D	111892



"Flamme Verte" quality charter



Clean glass system



For 50 cm logs*



Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety



Heating body with cast iron lining



Air distributor included



Continuous fire, the embers last over 10 hours



Support foot included



Pre-heating of the secondary air in a special heat exchanger



Smoke collector with Innox HR smoke baffle: helps concentrate the heat and amplifies the clean glass system



Smoke flue with collector: allows any condensate to be burned completely



IN'AIR connection module, for operation independently of the mechanical ventilation system



Optional turbines




Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

[NEW]

Strong points

- Firebox insert
- Easy installation
- Output 74 %
- Nominal output 9 kW
- All screen-printed glass front (Oréa 58)
- Cast iron door (Oréa 59)
- "Wave" decor hearth plate
- 10 hours continuous burning
- Large ashpan
- Stainless steel smoke baffle
- Options :
 - AT01 draught adapter
 - PS 67 support foot
 - Warm air nozzles (natural convection only)

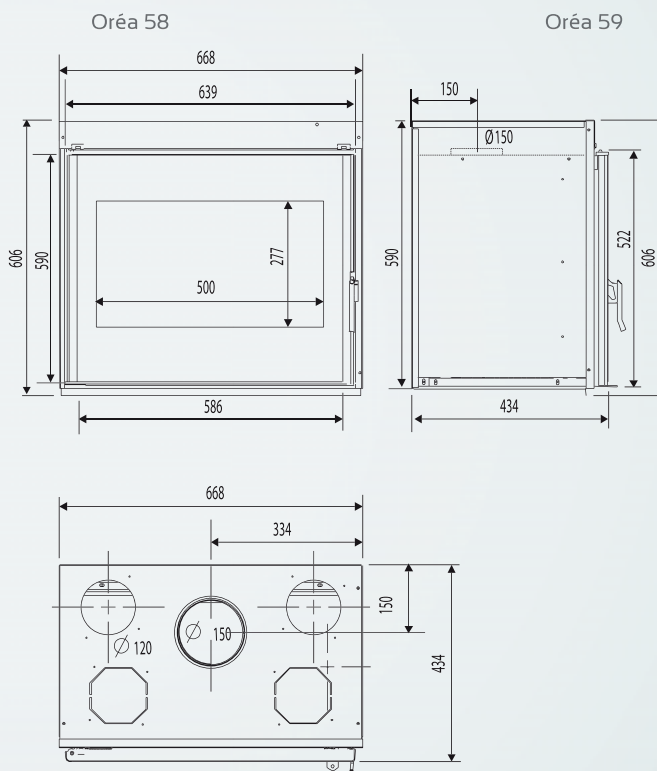

Oréa 58 is also available in:
ORÉA 58 D
 version with automatic door spring.



MODEL	ORÉA	
DOOR OPENING	SIDE	REF.
	58	111897
VERSIONS	58 D	111935
	59	111961



"Flamme Verte" quality charter



French standard



Clean glass system



For 50 cm logs*



Air distributor included



Continuous fire, the embers last over 10 hours



Ashpan accessible while the fire is in use



Optional support foot available



Smoke collector with Inoxis HR smoke baffle: helps concentrate the heat and amplifies the clean glass system



Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

TERTIO FIREBOX-INSERTS

MADE-TO-MEASURE "READY HEATING"

Designed for use in an existing or new fireplace, TERTIO firebox-inserts transform a fireplace into a real heating appliance.

TERTIO is a complete firebox-insert concept that can be integrated into a new fireplace (as a firebox) or existing fireplace (as an insert), adapting to all configurations.

A large glass surface area and a cast iron front contribute to the fireplace's attractiveness. 3 sizes and 16 models to adapt to any fireplace: with 3 widths and 6 heights, with or without a Turbo, there is always a solution for your fireplace.

"Continuous burning" for real heating performances: the heating body is designed to guarantee the embers will last over 10 hours*. Most Tertio models are classified "continuous burning".

* In the conditions of installation and use described in the instructions.

PERFECT DISTRIBUTION OF THE HEAT

Thanks to their high tech design, TERTIO firebox-inserts provide optimum heat distribution.

- The tangential turbine provides accelerated air flows and therefore perfect diffusion of the warm air.
- If the appliance is used as a firebox, the warm air distributor box can be used to heat one or more other rooms, by connecting up warm air distribution ducts.
- If it is used as insert (in an existing fireplace), warm air distribution is forbidden. A very large warm air outlet at the front of the appliance heats the main room.



THE TERTIO RANGE: ALL THE OPTIONS OF A REAL HEATING APPLIANCE

- 1 2 or 4 nozzles with \varnothing 125 or 150 mm (only when used as a firebox), to distribute the warm air to other rooms.
- 2 Two-speed turbine**: extra flat, equipped with a thermostat.
- 3 Support foot kit: to adapt the height of the firebox to the dimensions of SUPRA fireplaces.

** not adaptable to SUPRA fireplaces.



TERTIO firebox-inserts are certified NF.

Tertio

Side view 1 side

Strong points

- Side view, 1 side
- Use as a firebox in a new fireplace or as insert (to add to an existing fireplace)
- Double-envelope stainless steel smoke baffle. Considerably increases the output and efficiency of the fire
- Nozzle removable from the inside; easy to install
- Side window supplied on the right side, can be reversed to the left on installation
- "Clean glass" system



TERTIO 67 VL1
Width 67 cm
Output 77 %
Nominal output 9 kW
Window on right
(can be reversed to left)
Options :
• Warm air nozzles
 ∅ 125 or 150 mm
• KT67 turbine kit
• PS67 support foot
• Beam protection kit



TERTIO 76 VL1
Width 76 cm
Output 70 %
Nominal output 11 kW
Window on right
(can be reversed to left)
Options :
• Warm air nozzles
 ∅ 125 or 150 mm
• KT76 turbine kit
• PS76 support foot
• Beam protection kit

The TERTIO 67 VL1 and 76 VL1 are also available in:
67 VL1 D AND 76 VL1 D
versions with automatic door spring.

MODEL	TERTIO	
DOOR OPENING	SIDE	REF.
VERSIONS	67 VL1	111204
	76 VL1	111207
	67 VL1 D	111211
	76 VL1 D	111214



"Flamme Verte" quality charter



French standard



Clean glass system



For 50 cm logs*



Triple envelope heating body (2 + 1):
airtight combustion chamber + interior lining
+ third envelope for greater safety



Heating body with cast iron lining



Air distributor included



Ashpan accessible while the fire is in use



Optional support foot available



Smoke collector with Inoxis HR smoke baffle: helps concentrate the heat and amplifies the clean glass system



Optional turbines



Surface heated (table p. 113)



Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

Tertio

Side view, 2 sides

Strong points


- Use as a built-in fire in a new fireplace or as a insert-firebox (to add to an existing fireplace)
- Connection nozzle removable from the inside; easy to install; easy to maintain
- "Clean glass" system
- Automatic door spring (models D)





TERTIO 67 VL2 D
Width 67 cm
Output : 75 %
Nominal output 8 kW
3 glass sides




TERTIO 76 VL2 D
Width 76 cm
Output : 75 %
Nominal output 9,5 kW
3 glass sides



Tertio 67 VL2 D



Tertio 76 VL2 D



"Flamme Verte" quality charter



French standard



Clean glass system



For 50 cm logs*



For 33 cm logs*



T54 - T55
Triple envelope heating body (2 + 1):
airtight combustion chamber + interior lining
+ third envelope for greater safety



Heating body with cast iron lining



Air distributor included



Continuous fire,
the embers last over 10 hours



Ashpan accessible while
the fire is in use



Optional support foot available



Smoke collector with Innox HR smoke
baffle: helps concentrate the heat and
amplifies the clean glass system



Optional turbines



Surface heated (table p. 113)



Surface heated (table p. 113)



Surface heated (table p. 113)



Surface heated (table p. 113)



Surface heated (table p. 113)

MODEL	TERTIO	
	DOOR OPENING	REF.
VERSIONS	67 VL2 D	111212
	76 VL2 D	111447

* Indication of the standard size of logs on general sale.

Tertio

Cast iron door



TERTIO 55
 Width 55 cm
 Output : 70 %
 Nominal output 7 kW
 2 nozzles ø 125 mm included
Options :
 • KT55 turbine kit
 • PS55 support foot
 • Beam protection kit
 • CF 55 trim frame



TERTIO 69
 Width 67 cm
 Output : 77 %
 Nominal output 9 kW
 10 hours continuous burning
 Reversible hearth plate
Options :
 • Warm air nozzles
 ø 125 mm or 150 mm
 • KT67 turbine kit
 • PS67 support foot
 • Beam protection kit
 • T67 Orféo decorative front
 • CF 67 trim frame



TERTIO 67
 Width 67 cm
 Output : 77 %
 Nominal output 9 kW
 10 hours continuous burning
 Reversible hearth plate
Options :
 • Warm air nozzles ø 125
 or 150 mm
 • KT67 turbine kit
 • PS67 support foot
 • Beam protection kit
 • T67 Orféo decorative front
 • CF 67 trim frame



TERTIO 76
 Width 76 cm
 Output : 70 %
 Nominal output 12 kW
 10 hours continuous burning
 Reversible hearth plate
Options :
 • Warm air nozzles
 ø 125 mm or 150 mm
 • KT76 turbine kit
 • PS76 support foot
 • Beam protection kit
 • T67 Orféo decorative front
 • CF 67 trim frame

HEARTH PLATE

Exclusive: 1 plate, 2 themes*

Turn for a choice of theme.

Tertio 67 - 76 -
 670 V - 760 V

Tertio 69 - 79 - 690 V - 790 V
 64 - 74 - 640 V - 740 V



"Rustic" trim



"Wave" trim



"Contemporary" trim



"Classic" trim

*(except Tertio 55 and 54)



TERTIO 79
 Width 76 cm
 Output : 70 %
 Nominal output 12 kW
 10 hours continuous burning
 Reversible hearth plate
Options :
 • Warm air nozzles
 ø 125 mm or 150 mm
 • KT76 turbine kit
 • PS76 support foot
 • Beam protection kit
 • T76 Orféo decorative front
 • CF 76 trim frame

MODEL	TERTIO		
	DOOR OPENING	SIDE	REF.
VERSIONS	55	111200	55x44x35 cm
	67	111201	67x50x46 cm
	69	111765	67x50x46 cm
	76	111202	76x59x48 cm
	79	111768	76x59x48 cm
	67 D	111210	67x50x46 cm
	76 D	111213	76x59x48 cm

TERTIO 67 and 76
 are also available in:

67 D AND 76 D

versions with automatic door spring.

Tertio

All glass door

Strong points

- Use as a built-in fire in a new fireplace or as a insert-firebox (to add to an existing fireplace)
- Double-envelope stainless steel smoke baffle.
- Connection nozzle removable from the inside; easy to install; easy to maintain
- "Clean glass" system



TERTIO 54
Width 55 cm
Output 70 %
Nominal output 7 kW
All glass door
2 nozzles \varnothing 125 mm included
Options :
• KT55 turbine kit
• PS55 support foot
• Beam protection kit
• CF 55 trim frame.



TERTIO 64
Width 67 cm
Output 77 %
Nominal output 9 kW
All glass door
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles \varnothing 125 mm or 150 mm
• KT67 turbine kit
• PS67 support foot
• Beam protection kit
• T67 Orféo decorative front
• CF 67 trim frame



TERTIO 74
Width 76 cm
Output 70 %
Nominal output 12 kW
All glass door
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles \varnothing 125 mm or 150 mm
• KT76 turbine kit
• PS76 support foot
• Beam protection kit
• T76 Orféo decorative front
• CF 76 trim frame



Adaptable to the ORFEO range of decorative fronts

See page 10

TERTIO 54, 64 and 74 are also available in: 54 D, 64 D AND 74 D versions with automatic door spring.



Tertio 74

MODEL	TERTIO		
	DOOR OPENING	SIDE	REF. DIMENSIONS W X H X D
VERSIONS	54	111877	55x44x39 cm
	64	111879	67x50x46 cm
	74	111881	76x59x48 cm
	54 D	111883	55x44x39 cm
	64 D	111884	67x50x46 cm
	74 D	111885	76x59x48 cm

TERTIO AND TERTIO TURBO



"Flamme Verte" quality charter



French standard



Clean glass system



For 50 cm logs*



For 33 cm logs*



Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety



Heating body with cast iron lining



Air distributor included



Continuous fire, the embers last over 10 hours



Ashpan accessible while the fire is in use



Optional support foot available



Optional turbines



Surface heated (table p. 113)



Surface heated (table p. 113)



Surface heated (table p. 113)




Surface heated (table p. 113)


* Indication of the standard size of logs on general sale.

Tertio turbo




 TERTIO 540 V
Width 64 cm
Output 70 %
Nominal output 7 kW
Cast iron door
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles
 ∅ 125 mm or 150 mm
• P555 support foot
• Beam protection kit




 TERTIO 550 V
Width 64 cm
Output 70 %
Nominal output 7 kW
Cast iron door
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles
 ∅ 125 mm ou 150 mm
• P555 support foot
• Beam protection kit




 TERTIO 640 V
Width 76 cm
Output 77 %
Nominal output 9 kW
All glass door
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles
 ∅ 125 mm ou 150 mm
• PS67 support foot
• Beam protection kit



 TERTIO 670 V
Width 76 cm
Output 77 %
Nominal output 9 kW
Cast iron door
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles
 ∅ 125 mm ou 150 mm
• PS67 support foot
• Beam protection kit




 TERTIO 690 V
Width 76 cm
Output 77 %
Nominal output 9 kW
Cast iron door
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles
 ∅ 125 mm or 150 mm
• PS67 support foot
• Beam protection kit



 TERTIO 760 V
Width 85 cm
Output 70 %
Nominal output 12 kW
Cast iron door
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles
 ∅ 125 mm or 150 mm
• PS76 support foot
• Beam protection kit



 TERTIO 740 V
Width 85 cm
Output 70 %
Nominal output 12 kW
All glass door
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles
 ∅ 125 mm or 150 mm
• PS76 support foot
• Beam protection kit



 TERTIO 790 V
Width 85 cm
Output 70 %
Nominal output 12 kW
Cast iron door
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles
 ∅ 125 mm or 150 mm
• PS76 support foot
• Beam protection kit

■ Use as a built-in fire in a new fireplace or as a insert (to add to an existing fireplace)

■ With turbine

■ Hot air distribution (for built-in firebox only)

■ 2 ventilation speeds

■ 10 hours continuous burning

■ Double-envelope stainless steel smoke baffle.

■ Connection nozzle removable from the inside; easy to install; easy to maintain

■ Reversible hearth plate

■ "Clean glass" system

MODEL	TERTIO AVEC TURBINE		
DOOR OPENING	SIDE	REF.	DIMENSIONS W X H X D
VERSIONS	540 V	111878	64x56x39 cm
	550 V	111405	64x56x39 cm
	670 V	111406	76x61x48 cm
	690 V	111767	76x61x48 cm
	640 V	111880	76x61x48 cm
	760 V	111407	85x67x49 cm
	790 V	111770	85x67x49 cm
	740 V	111882	85x67x49 cm

TERTIO TURBO ADVANTAGES



Smoke collector with Inox HR smoke baffle: helps concentrate the heat and amplifies the clean glass system



Turbines included

TURBO-INSERTS WITHOUT TUBING

TO TRANSFORM A FIREPLACE INTO
A REAL HEATING APPLIANCE

QUICK AND EASY TO INSTALL

POSITION, SCREW, HEAT

With SUPRA, enjoy a real fire again by transforming an old fireplace into an efficient, economical and safe heating appliance.

NO CONNECTION, VERY LITTLE WORK REQUIRED

The installation of the insert requires a chimney flue in good condition, which should be checked by a specialist prior to installation.



A Frame:
6 fixing
points



B Finishes:
easy to execute
front finish




C Build in:
just slide the
insert into place,
it is very simple




D Heat:
at last the
pleasure of a
real fire again

DISTRIBUTION OF THE HEAT IN THE ROOM

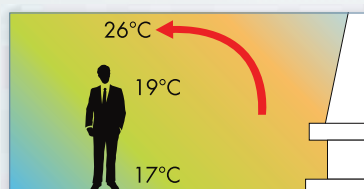

WITHOUT TUBING

Natural convection of the warm air. High output temperature and irregular distribution of the heat (hot air tends to accumulate under the ceiling).

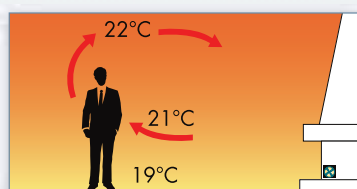

WITH TURBINES


Convection pulsed by the turbines and a greater warm air flow. More comfortable output temperature and more even distribution of the warm air in the room.

TURBO EFFICIENCY

All SUPRA inserts are equipped as standard with two 2-speed turbines: "high" speed to warm up the room quickly, "comfort" speed to "stir" the ambient air and "off" when the fire is burning on low speed.

A thermostat starts the turbines automatically on high speed, as soon as the warm air temperature rises. 230 V - 50 Hz - 50 W.

- 1 Pulsed warm air outlet.
- 2 Vitroceramic door with "clean glass" system.
- 3 Large capacity ashpan for less frequent emptying.
- 4 Fresh air inlet. Location of the turbines.
- 5 The hot smoke passes through the heat exchanger tubes and is evacuated directly into the smoke collector of your old fireplace; on installation, there is no need to make a connection with the old flue.
- 6 The tubes used for the warm air circulation provide a larger thermal exchange surface and contribute to better efficiency. The warm air circuit is totally separate from the combustion smoke circuit.

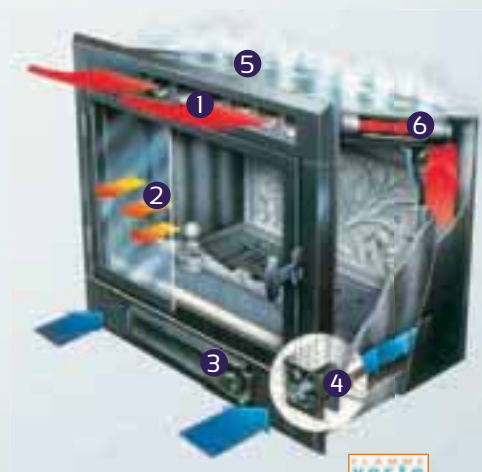




Turbo-insert



Strong points

- To fit into an existing fireplace
- No connection; very little work required
- Integrated turbines; thermostat
- Cast iron heating body
- Tube exchanger
- Rapid diffusion of the heat
- Large ashpan 3.l. (model 634) and 4.l. (models 644 and 654)
- "Clean glass" system
- Optional:
 - Beam protection kit



TURBO-INSERTS 634, 644 and 654 are also available in:
634 D, 644 D AND 654 D
 versions with automatic door spring.











-  TURBO-INSERT 634
Output 78 %
Nominal output 6 kW
-  TURBO-INSERT 644
Output 79 %
Nominal output 7 kW
-  TURBO-INSERT 654
Output 80 %
Nominal output 8 kW



MODEL	TURBO-INSERTS	
DOOR OPENING	SIDE	REF.
VERSIONS	634	112021
	644	112022
	654	112023
	634 D	112024
	644 D	112025
	654 D	112026

Models	634	644	654
H'	53	60	69
H	50	58	67
W'	65	72	72
W	63	70	70
D	42	47	47

Dimensions in cm.

-  "Flamme Verte" quality charter
-  Clean glass system
-  For 50 cm logs*
-  For 33 cm logs*
-  Heating body with cast iron lining
-  Ashpan accessible while the fire is in use
-  Turbines included
-  Surface heated (table p. 113)
-  Surface heated (table p. 113)
-  Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

Accessories

Accessories for better performance

TURBINE KITS

The turbine kit accelerates the distribution of warm air around the firebox and into the distribution circuit.

The heat is distributed more rapidly. Power supply 230 V / 50 Hz.

KT 1455 TURBINE KIT



For Univers 2, Cristal 3, Diadème and Supravisión fireboxes.
Flow 400 m³/hr. Two speeds.
Length of ø 150 mm ducting: 24 metres max. in total and 9 metres max. per duct. Placed in the basement or in an adjoining room. Connected to the firebox by a ø 150 mm duct (not supplied) with the KRT 260 A kit (for Univers 2, Cristal 3, Diadème) or the KRT 255 kit (for Supravisión). Supplied with a switch (to be placed near the fireplace), connection nozzle and closing flap.
Consumption: 100 W.

KTE 152 BITURBO KIT



For "classique" fireboxes (except 148 C / 168 C), Univers, Altima, Saphir, Emeraude, Cristal and Diadème.
Two speeds. Length of ø 150 mm ducting: 10 metres max. in total and 5 metres max. per duct.
Placed directly underneath the firebox and fastening by magnets.
Supplied with a switch to be placed near the fireplace.
Consumption: 50 W.

KT 55, 67, 76 TURBINE KITS



Specially designed for Tertio firebox-inserts.
Flow 200 m³/hr. Two speeds.
Length of ø 150 mm ducting: 8 metres max. in total and 4 metres max. per duct. Fitted directly underneath the firebox-insert when installed in an existing fireplace, if there is enough space.
Thermostat-controlled automatic operation for speed 1.
Consumption: 25 W.

IMPORTANT



DRAUGHT REGULATOR*

(French Technical Evaluation certificate 14/04 - 922-01)

The correct operation of your heating appliance depends on the quality of the draught in the chimney. The best solution is to fit a draught regulator that adapts to the speed of your appliance, on the smoke outlet nozzle. The regulator solves the problem of excess draught.

*Accessories available:

- Regulator ø 180 :
ref. EM 180-A
- Regulator ø 200 :
ref. EM 200-A
- Regulator valve ø 153 :
ref. CM 153
- Regulator valve ø 200 :
ref. CM 200



SUPPORT FEET

The use of a support foot is recommended when installing as a firebox.

PS 55 : support foot for Tertio
54, 54OV, 55 (height: 300 mm)


PS 67 : support foot for Astra,
Tertio 64, 64OV, 67 - 67 VL1/2 -
69 (height from 256 to 320 mm),
670 V - 690 V

PS 76 : support foot for Tertio
74, 74OV, 76 - 76 VL1/2 - 79
(height: from 292 to 332 mm),
760 V - 790 V



GRILL KIT FOR "CLASSIQUE" FIREBOXES

Enjoy delicious food barbecued on a wood fire all year round, thanks to the SUPRA grill kit. It can easily be fitted to all the fireboxes in the "classique" range.

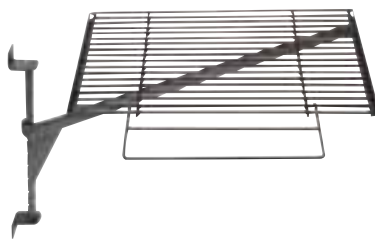

TRIM FRAMES FOR TERTIO FIREBOX-INSERTS

CF 55 (Tertio 55-54)
CF 67 (Tertio 64-67-69)
CF 76 (Tertio 74-76-79)

BEAM PROTECTION KIT

FOR ALL
INSERTS



When installing an insert in a fireplace with a wood beam, it is necessary to insulate the underneath of the beam, if it is less than 30 cm from the hot air outlets.

SUPRA has developed an adaptable protection kit.

A2C2 THE HEAT DISTRIBUTION SYSTEM



Consists of a turbine kit and a warm air distributor. System meeting the requirements

of French standard DTU 24-2 of December 2006 and certified by Technical Evaluation certificate 14/05 - 931 - 01.

Accessories

WARM AIR DISTRIBUTORS

Fitted as standard or added as options, warm air distributors collect the heat around the firebox to distribute it through flexible ducting. The system fits over the firebox and constitutes an envelope that channels the hot air towards 2 or 4 outlet nozzles. One or more \varnothing 125 mm or 150 mm ducts are connected to them to serve one or more adjoining or upstairs rooms.

WARM AIR DISTRIBUTORS*

DA 101 : for Astra firebox

DA 105 : for Altima firebox
(kit includes support foot)

DA 1700 : for Saphir firebox

DA 1800 : for Emeraude firebox

DA 168 C + CDA 168 C : for 168 C firebox

*supplied with 2 nozzles \varnothing 150



DA 105

FLUES

to connect extra warm air ducts
2 nozzles \varnothing 150 - 4 nozzles \varnothing 125

PROTECTIVE CASING

CP 101 : for Astra firebox

PROTECTIVE CASING AND SUPPORT FOOT

DA 168 C : for 168 C firebox

WARM AIR DISTRIBUTOR COVERS

supplied with 2 nozzles \varnothing 150 mm


CDA 150 C : for 150 C firebox

CDA 168 C : for 168 C firebox

CDA 200 A : for Univers -
Premium firebox

CDA 255 : for Supravision firebox

CDA 450 A : for Cristal and Diadème
Premium firebox

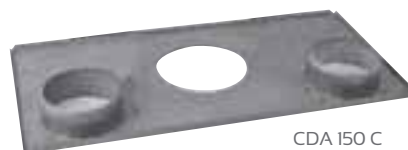


CDA 150 C

Variable geometry connection **homykit**[®]

Homykit[®] is a reliable, safe, multi-directional and extendable connection kit specially designed to solve the connection problems posed by wood-burning fireboxes.

- ❶ Universal chimney block connection
- ❷ Top adjustable elbow
- ❸ Bottom adjustable elbow
- ❹ Draught regulator
- ❺ Extension (if necessary)
- ❻ Wide clearance telescopic system allowing the connection length to be adjusted accurately to the height available under the ceiling.

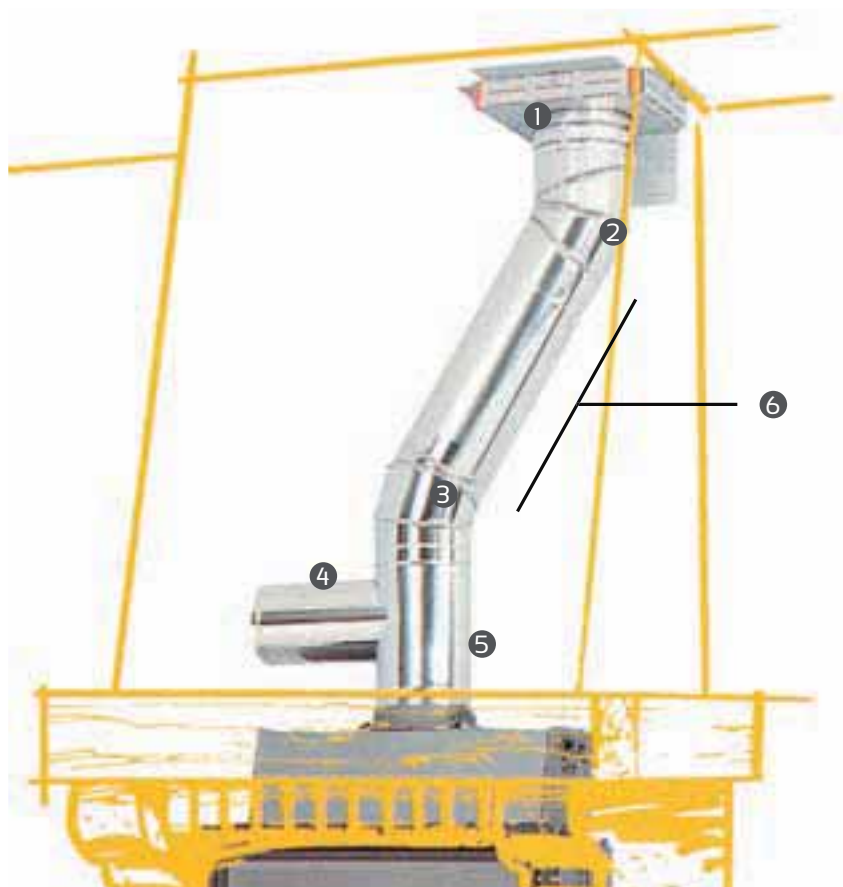

STRONGLY RECOMMENDED

Draught regulator unit \varnothing 180 mm (ref. EM-180-A) or \varnothing 200 mm (ref. EM-200-A) (all models)

The complete connection kit includes:

- Telescopic connector (RT) - 6
- Chimney block connector (RB) - 1
- Draught regulator unit (EM) - 4
- Elbows - 2 / 3

Complete kit references:

- HKT 180 A (\varnothing 180)
- HKT 200 A (\varnothing 200)

homykit[®]

Adapts to your situation



Side connection



Rear connection



Corner installation



Front-facing installation



Angled installation

Fireplace range



	ARIA	ATHÉNA	AUBUSSON	AURIAC 80 / 97
FIREPLACES				
Adaptable fireboxes	DF 583 N	150 C, 152 C, 162 C, 168 C (+ P5 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ P5 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN	150 C, 152 C, 162 C, 168 C (+ P5 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ P5 76), Univers 200 A-PN / 230 A-PN / Pack / Pack VPN, Univers 201 A-PN / 231 A-PN / Pack / Pack VPN	Auriac 80 : Saphir 1700, 1701, 1721, 1731 Auriac 97 : Cristal 401 BN / Pack / Pack VPN, Cristal 401 BB / Pack, Cristal 431 BN / Pack VPN, Cristal 431 BB / Pack
Beam	-	Edelroc®	Tropical hardwood	Tropical hardwood
Over-formwork	-	-	-	-
Position	installed at right angles to the wall	installed against the wall	installed against the wall	installed against the wall
Optional staff hood	-	-	-	-
Pages	25	35	56	67

	BEAUCHAMP	BEAURIVAGE	BELLERIVE	BELMONT
FIREPLACES				
Adaptable fireboxes	150 C, 152 C, 162 C, 168 C (+ P5 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ P5 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN, Univers 200 AD Pack VPN, Univers 201 A Pack VPN, Univers 231 A Pack VPN	150 C, 152 C, 162 C, 168 C (+ P5 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ P5 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN	150 C, 152 C, 162 C, 168 C (+ P5 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ P5 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN	150 C, 152 C, 162 C, 168 C (+ P5 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ P5 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN
Beam	-	Tropical hardwood	Tropical hardwood	Tropical hardwood
Over-formwork	-	-	-	-
Position	installed against the wall	cut-off corners	installed against the wall	installed against the wall
Optional staff hood	-	-	-	-
Pages	24	54	52	55

	BELVAL GALB / PRIS 80	BERGERAC	BILBAO 2	BOLÉRO 2
FIREPLACES				
Adaptable fireboxes	Belval Galb 80 : Emeraude 1800, 1801, 1821, 1831 Belval Pris 80 : Saphir 1700, 1701, 1721, 1731	Astra 2 (+ P5 67), Altima 105 (+ P5 67), Altima 106 (+ P5 67), Tertio 64 / 67 / 69 (+ P5 67), Oréa 58 / 59 (+ P5 67)	Oréa 58 / 59, Astra 2, Altima 105 / 106, Tertio 67 / 69	Oréa 58 / 59, Astra 2, Altima 105 / 106, Tertio 64 / 67 / 69
Beam	-	Tropical hardwood	Edelroc®	Edelroc®
Over-formwork	-	-	-	-
Position	cut-off corners	installed against the wall	installed against the wall	cut-off corners
Optional staff hood	245089 / 245008	-	-	-
Pages	16	58	48	43

	CARMINE	CHARLESTON	CHÂTILLON	CHEVANNES
FIREPLACES				
Adaptable fireboxes	Astra 2 (+ P5 67), Altima 105 / 106 (+ P5 67), Tertio 64 / 67 / 69 (+ P5 67), Oréa 58 / 59 (+ P5 67)	Astra 2, Altima 105, Tertio 67 / 69 (Charleston 2) Oréa 58 / 59 (Charleston 3)	Oréa 58 / 59, Astra 2, Altima 105 / 106, Tertio 64 / 67 / 69	150 C, 152 C, 162 C, 168 C (+ P5 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ P5 76), Univers 200 A-PN / 230 A-PN / Pack / Pack VPN, Univers 201 A-PN / 231 A-PN / Pack / Pack VPN
Beam	Tropical hardwood	Edelroc®	Tropical hardwood	Tropical hardwood
Over-formwork	-	-	-	-
Position	installed against the wall	installed against the wall	installed against the wall	installed against the wall
Optional staff hood	-	-	-	-
Pages	57	37	62	60

	COLBERT	COMO	CONCERTO 140 / 180
FIREPLACES			
Adaptable fireboxes	150 C, 152 C, 162 C, 168 C (+ P5 76 + DA), Tem- poris 2 D / 3 D, Tertio 76 D / 79 D / 74 D (+ P5 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN	Oréa 58 / 59	150 C, 152 C, 162 C, 168 C (+ P5 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ P5 76), Univers 200 A-PN / 230 A-PN / Pack, Univers 201 A-PN / 231 A-PN / Pack Univers 200 AD Pack VPN, Univers 201 A Pack VPN, Univers 231 APack VPN
Beam	Edelroc®	Edelroc®	Edelroc®
Over-formwork	-	-	-
Position	cut-off corners	installed against the wall	installed against the wall
Optional staff hood	-	-	245009
Pages	39	32	23



	CORALLINE	CYCLADE GALB / PRIS 97	DORIS 67	DORIS 97 / 80
FIREPLACES				
Adaptable fireboxes	Astra 2 (+ PS 67), Altima 105 / 106 (+ PS 67), Tertio 64 / 67 / 69 (+ PS 67), Oréa 58 / 59 (+ PS 67)	Cyclade Galb 97 : Diadème 501 BN / Pack, Diadème 531 BN / Pack Cyclade Pris 97 : Cristal 401 BN / Pack, Cristal 401 BB / Pack, 401 B Pack VN, Cristal 431 BN / Pack, Cristal 431 BB / Pack, 431 B Pack VN	Cosmos	Doris 97 : Diadème 501 BN / Pack, Diadème 531 BN / Pack, Diadème 501 B Pack VN, Diadème 531 B Pack VN Doris 80 : Emeraude 1800, 1801, 1821, 1831
Beam	Tropical hardwood	-	-	-
Over-formwork	-	-	-	-
Position	cut-off corners	installed against the wall	cut-off corners	cut-off corners
Optional staff hood	-	245076 / 245008	245093	245077 / 245080
Pages	57	15	20	18

	ESTELLE	ÉVANE	FLEURAC 2	FORLANE GALB / PRIS 80
FIREPLACES				
Adaptable fireboxes	Tertio 54 (+ PS 55), Tertio 54 (+ PS 55 + KT 55) Tertio 55 (+ PS 55), Tertio 55 (+ PS 55 + KT 55)	Supravisoin 255 A	I50 C, I52 C, I62 C, I68 C (+ PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN	Forlane Galb 80 : Emeraude 1800, 1801, 1821, 1831 Forlane Pris 80 : Saphir 1700, 1701, 1721, 1731
Beam	-	-	Edelroc®	-
Over-formwork	-	-	-	yes
Position	installed against the wall	installed against the wall	installed against the wall	semi-built in front
Optional staff hood	-	245051	245001	245089 / 245008
Pages	49	14	47	17

	GALIA	HESTIA	ISÉO	KASARI
FIREPLACES				
Adaptable fireboxes	Cosmos	I50 C, I52 C, I62 C, I68 C (+ PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN / Pack, Univers 201 A-PN / 231 A-PN / Pack, Univers 200 AD Pack VPN, Univers 201 A Pack VPN, Univers 231 A Pack VPN, DF 583 N	Oréa 58 / 59	I50 C, I52 C, I62 C, I68 C (+ PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN / Pack, Univers 201 A-PN / 231 A-PN / Pack, Univers 200 AD Pack VPN, Univers 201 A Pack VPN, Univers 231 A Pack VPN, DF 583 N
Beam	-	Edelroc®	Edelroc®	-
Over-formwork	-	yes	-	-
Position	installed against the wall	built in front	installed against the wall	built in front
Optional staff hood	245078	-	-	-
Pages	21	26	31	27

	LÉSINA	LONGCHAMP	LUGANO	MANCEY 76
FIREPLACES				
Adaptable fireboxes	Oréa 58 / 59	Diamant	Oréa 58 / 59	I50 C, I52 C, I62 C, I68 C (+ PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN / Pack / Pack VPN, Univers 201 A-PN / 231 A-PN / Pack / Pack VPN
Beam	-	Tropical hardwood	Edelroc®	Tropical hardwood
Over-formwork	-	-	-	-
Position	built in front	installed against the wall	installed against the wall	installed against the wall
Optional staff hood	-	-	-	-
Pages	30	66	33	64

	MAZEYROLLES	MÉDOC	MÉRIBEL	MONTAVELLE 67
FIREPLACES				
Adaptable fireboxes	Supravisoin 255 A	Tertio 67 VL2 (+ PS 67), Tertio 67 VL1 (+ PS 67), Astra 2 (+ PS 67), Altima 105 (+ PS 67)	I50 C, I52 C, I62 C, I68 C (+ PS 76 + DA), Tempo- ris 2D / 3D, Tertio 76 / 79 / 74 (+PS 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN	Astra 2 (+ PS 67), Altima 105 / 106 (+ PS 67), Tertio 64 / 67 / 69 (+ PS 67), Oréa 58 / 59 (+ PS 67)
Beam	Tropical hardwood	Edelroc®	Tropical hardwood	Tropical hardwood
Over-formwork	-	-	-	-
Position	installed against the wall	installed against the wall	installed against the wall	installed against the wall
Optional staff hood	-	-	-	-
Pages	61	45	53	63

Fireplace range



	MONTAVELLE 76	ONDIS	OPUS	ORFÉO COLOR
FIREPLACES				
Adaptable fireboxes	150 C, 152 C, 162 C, 168 C (+ PS 76 + DA), 148 C (+ PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN / Pack / Pack VPN, Univers 201 A-PN / 231 A-PN / Pack / Pack VPN	FV 51	Window on the left: Supravisation 267 Window on the right: Supravisation 269	Tertio 76 / 79, Univers 2, DF 583 N
Beam	Tropical hardwood	-	-	-
Over-formwork	-	yes	-	yes
Position	installed against the wall	built in front	corner	built in front
Optional staff hood	-	-	245074	-
Pages	65	28	12	10

	ORFÉO OXYD / CITY / MESO	ORFÉO DÉCADE 3 N / INOX	ORFÉO VAGUE	ORSAY
FIREPLACES				
Adaptable fireboxes	DF 583 N, Univers 200 AD-PN, Univers 200 AD Pack, Univers 230 AD-PN, Univers 230 AD Pack PN, Univers 201 A-PN, Univers 231 A-PN, Univers 201 A Pack VPN, Univers 231 A Pack VPN, Univers 200 AD Pack VPN	DF 583 N, Univers 200 AD-PN, Univers 200 AD Pack, Univers 230 AD-PN, Univers 230 AD Pack PN, Univers 201 A-PN, Univers 231 A-PN, Univers 201 A Pack VPN, Univers 231 A Pack VPN, Univers 200 AD Pack VPN	DF 583 N, Univers 200 AD-PN, Univers 200 AD Pack, Univers 230 AD-PN, Univers 230 AD Pack PN, Univers 201 A-PN, Univers 231 A-PN, Univers 201 A Pack VPN, Univers 231 A Pack VPN, Univers 200 AD Pack VPN	150 C, 152 C, 162 C, 168 C (+ PS 76 + DA), 148 C (+ PS + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN, DF 583 N
Beam	-	-	-	-
Over-formwork	yes	yes	yes	yes
Position	built in front	built in front	built in front	built in front
Optional staff hood	-	-	-	-
Pages	7	9	8	34

	PARCEY	PADIRAC	PALISSE	PARVELLE
FIREPLACES				
Adaptable fireboxes	150 C, 152 C, 162 C, 168 C (+ PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN / Pack / Pack VPN, Univers 201 A-PN / 231 A-PN / Pack / Pack VPN	150 C, 152 C, 162 C, 168 C (+ PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN	150 C, 152 C, 162 C, 168 C (+ PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN / Pack / Pack VPN, Univers 201 A-PN / 231 A-PN / Pack / Pack VPN	150 C, 152 C, 162 C, 148 C (+ PS 76 + DA), 168 C (+ PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN / Pack / Pack VPN, Univers 201 A-PN / 231 A-PN / Pack / Pack VPN
Beam	Tropical hardwood	Edelroc®	Tropical hardwood	Tropical hardwood
Over-formwork	-	-	-	-
Position	cut-off corners	cut-off corners	cut-off corners	cut-off corners
Optional staff hood	-	-	-	-
Pages	64	46	59	65

	PRÉLUDE	RICHELIEU	SALSA	SARDANE 2
FIREPLACES				
Adaptable fireboxes	Supravisation 255 A	150 C, 152 C, 162 C, 168 C (+ PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 D / 79 D / 74 D (+ PS 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN	150 C, 152 C, 162 C, 168 C (+ PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN / Pack, Univers 201 A-PN / 231 A-PN / Pack, Univers 200 AD Pack VPN, Univers 201 A Pack VPN, Univers 231 A Pack VPN	Oréa 58 / 59, Astra 2, Altima 105 / 106, Tertio 64 / 67 / 69
Beam	-	Edelroc®	Edelroc®	Edelroc®
Over-formwork	-	-	-	-
Position	installed against the wall	installed against the wall	installed against the wall	installed against the wall
Optional staff hood	245075	-	-	-
Pages	13	39	22	42



	SARDANE 76	SÉGUR	SULLY	TALENCE 3
FIREPLACES				
Adaptable fireboxes	150 C, 152 C, 162 C, 168 C (+PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+PS 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN	150 C, 152 C, 162 C, 168 C (+ PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN	150 C, 152 C, 162 C, 168 C (+PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN	Oréa 58 / 59, Astra 2, Altima 105 / 106, Tertio 64 / 67 / 69
Beam	Edelroc®	Edelroc®	Edelroc®	Edelroc®
Over-formwork	-	-	-	-
Position	installed against the wall	installed against the wall	installed against the wall	installed against the wall
Optional staff hood	-	-	-	-
Pages	42	41	38	51

	TANGO	THÉMIS 67	THÉMIS 97 / 80	TOSCA
FIREPLACES				
Adaptable fireboxes	Astra 2, Altima 105, Tertio 67 / 69 (Tango 2) Oréa 58 / 59 (Tango 3)	Cosmos	Thémis 97 : Diadème 501 BN / Pack Diadème 531 BN / Pack, Diadème 501 B Pack VN, Diadème 531 B Pack VN Thémis 80 : Émeraude 1800, 1801, 1821, 1831	150 C, 152 C, 162 C, 168 C (+ PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN
Beam	Edelroc®	-	-	Edelroc®
Over-formwork	-	-	-	-
Position	cut-off corners	installed against the wall	installed against the wall	installed against the wall
Optional staff hood	-	245078	245076 / 245089	-
Pages	36	20	19	44

	TRAVELLING	TURENNE	VÉLINE	VERTIS
FIREPLACES				
Adaptable fireboxes	Eclipse, Eclipse DF	150 C, 152 C, Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN	150 C, 152 C, 162 C, 168 C (+PS 76 + DA), Temporis 2 D / 3 D, Tertio 76 / 79 / 74 (+ PS 76), Univers 200 A-PN / 230 A-PN, Univers 201 A-PN / 231 A-PN	FV 51
Beam	-	Edelroc®	-	-
Over-formwork	-	-	-	-
Position	built in front	installed against the wall	installed against the wall	built in front
Optional staff hood	-	-	-	-
Pages	11	40	50	29

CHOOSING THE RIGHT OUTPUT

The classification below will help you find in the catalogue the appliances that will suit your home (2.50 m high ceiling).

CLASS OF APPLIANCE	A	B	C	D	E	F	G	H	I
Poorly insulated house	20 m²	25 m²	30 m²	35 m²	40 m²	45 m²	50 m²	60 m²	65 m²
Well-insulated house**	55 m²	70 m²	80 m²	95 m²	110 m²	120 m²	135 m²	160 m²	175 m²
Output	4000 W	5500 W	6000 W	6500 W	8000 W	9000 W	10000 W	12000 W	13000 W

**Insulation standard after 1989

Firebox range

	ALTIMA		ASTRA 2/2D	CARAT 58 / 58 R	CLASSIQUES					COSMOS	CRISTAL 2						DIADÈME				DIAMANT	DOUBLE FACE	ÉCLIPSE		ÉMERAUDE			FV40D	FV51	OREA							
	105/105 D	106			148 C	150 C	152 C	162 C	168 C	1520 ADN	401 B / 401 B-B	401 B-PACK B	401 B-PACK N	401 B-PACK VN	431 B / 431 B-B	431 B-PACK B	431 B-PACK N	431 B-PACK VN	501 B-N	501 B-PACK N	501 B-PACK VN	531 B-N	531 B-PACK N	531 B-PACK VN	1421	583 N	ÉCLIPSE	ÉCLIPSE DF	1800 / 1800 D	1821 / 1801	1831			58 / 59	58 D		
Nominal output kW	11	9	10	9	13	13	13	11	11	9	11	13	13	11	13	13	11	13	13	13	11	13	13	9	10	11	10	11	11	11	8	9	9	9			
Efficiency 70 %	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
Continuous fire	•		•		•	•	•																											•	•		
Width of front in cm	67	67	67	67	76					67	97						67	78	96	80			63	60	67	67											
Flat view	•	•	•	•	•	•	•	•	•																•	•	•					•	•	•	•		
Front + side view										•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•												
Prismatic or curved view										•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•												
Side opening	•	•	•		•	•	•	•	•	•	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	•	•	▲	▲	•	•	•				•	•	
Lift-up opening		•		•				•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•				
Firebox with cast iron interior	•	•	•	•	•	•	•	•	•	•	•	•	•					•	•	•				•	•									•	•		
Firebox with brick interior														•	•	•										•	•		•	•	•						
Max. log length in cm	53		58	58	57					50	80						80				50	60	100	62			50	50	50	50							
Gross weight in kg	122	155	122	180/189	132	145	156	170	155	130	373	304	380	287	294	304	373	294	304	287	294	304	186	210	413	420	154	198	221	147	103	103					
Nozzle Ø mm	200		180	180	200					200	200						200				200	200	250	200			150	180	150								
Clean glass system	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
Combustion air connection												•	•		•	•		•	•		•	•		•									•				
Flue valve	•	•	•	•	•	•	•	•	•	•	•			•			•			•				•	•	•	•	•	•	•	•	•	•	•	•		
Bypass valve												•	•		•	•		•	•		•	•															
Removable smoke baffle	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Support foot	○	○	○	○	○	•	•	•	○	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	○	○	
4 levelling screws				•							•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Housing			○	•	•	•	•	○	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		○	○	○	•	•	•	•	•	•	
Air distributor	○	○	○	•	○	○	•	○	•	•	○	•	•	•	•	•	○	•	•	•	•	•	•	•	•	•	○	○	○	○	•	•	•	•	•	•	
Hot air outlet nozzles leading to distributor	2+2*	2+2*	2+2*	2+2*					2+2*	2+2*						2+2*				2+2*	2+2*	4	2+2*			2+2*	2+2*										
Hot air outlet in mm	150	125	125	150					150	150						150				150	150	150	150			125	125										
Turbine included																																					
Optional KTE 152 Biturbo kit	○	○		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	○	○	○	○	○				
Optional KT turbine											1455						1455																				
Optional KRT adapter											260 A						260 A																				
Pages	93		92	88	94	95				84	78	79						80	81				84	90	89		86	85			97						



 **SUPRA**
Le climat de confiance

BP 22 - F 67216 Obernai Cedex - Fax 03 88 95 12 40
www.supra.fr